

LUXORliving S8

Item no.: 4800425

theben

Smart Home

Actuators DIN rail and gateways

Description

- 8-way switching actuator LUXORliving
- LED switching status display for each channel
- Manual operation on device
- Switching functions: On/Off, pulse, On/Off delay, staircase light with warning
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>



Technical data

| LUXORliving S8 | |
|---|-----------------------|
| Operating voltage KNX | <4 mA |
| Operating voltage | 110 - 240 V AC |
| Stand-by consumption | <0.3 W |
| Installation type | DIN rail |
| Width | 4 modules |
| Number of channels | 8 |
| Type of contact | NO contact, 16 A, 3 A |
| Incandescent/halogen lamp load | 2000 W |
| Halogen lamp load | 2000 W |
| Fluorescent lamp load (conventional) parallel-corrected | 1300 W (140 µF) |

| LUXORliving S8 | |
|--|---------------------|
| Fluorescent lamp load (conventional) not corrected | 2000 VA |
| Fluorescent lamp load (electronic ballast) | 1200 W |
| Energy saving lamps | 300 W |
| LED lamp < 2 W | 55 W |
| LED lamp 2-8 W | 600 W |
| LED lamp > 8 W | 600 W |
| Inrush current | max. 800 A / 200 µs |
| Type of protection | IP 20 |
| Protection class | II |

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800425

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025


Page 1 of 2

LUXORliving S8


Item no.: 4800425



Connection example

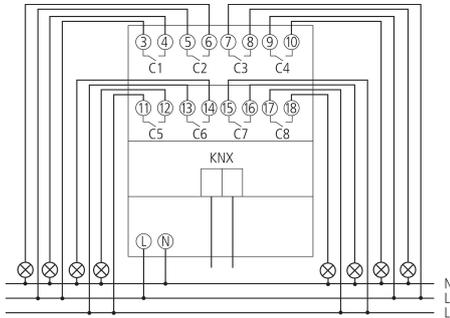

Scale drawings

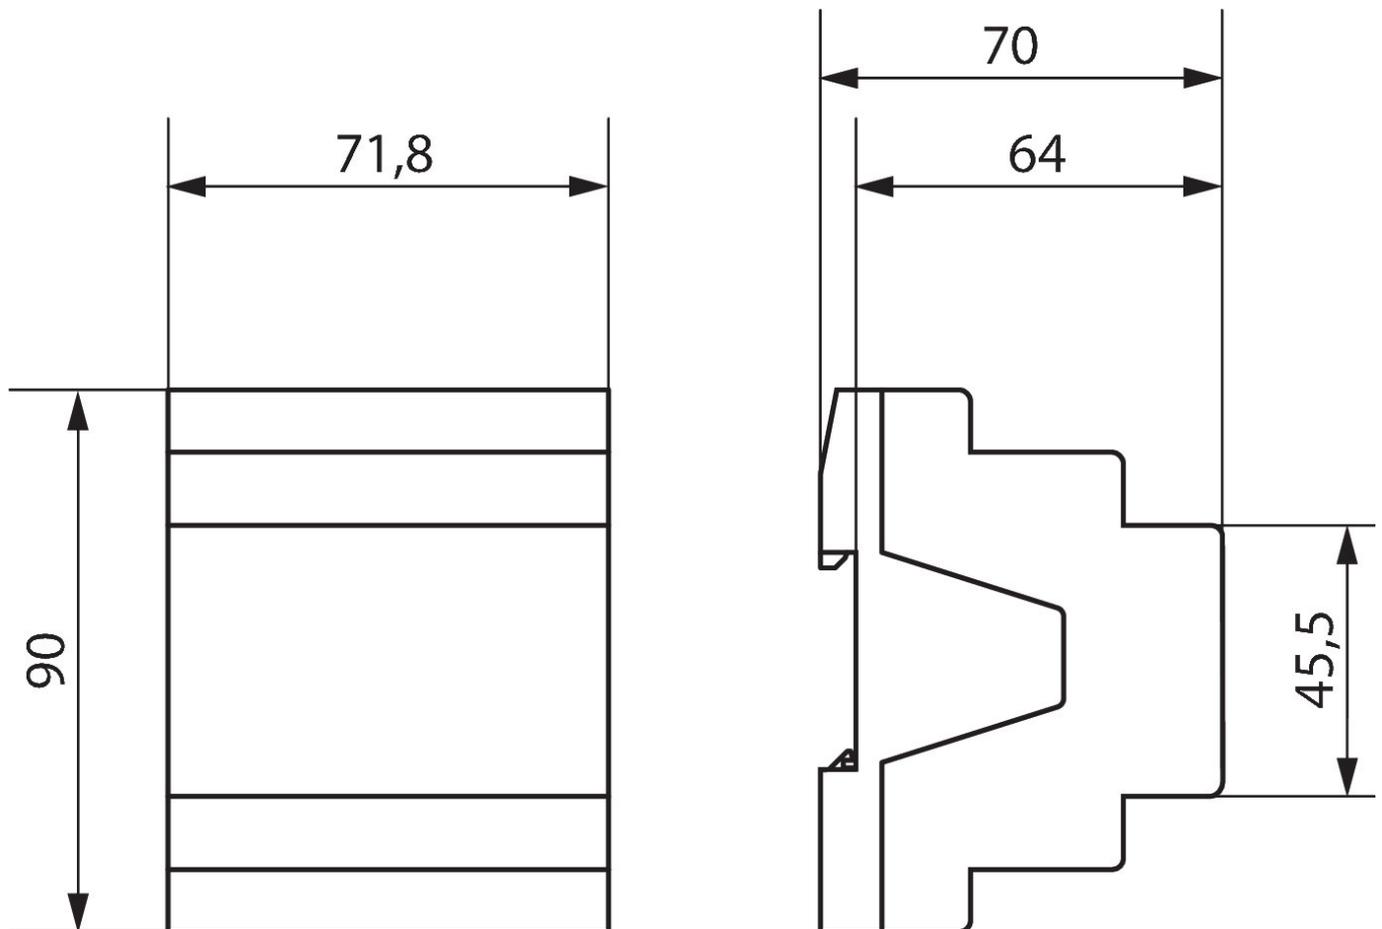

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800425

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.