

H03VV-F, 03VV-F*


H03VVH2-F, 03VVH2-F*

300/500V



DIN VDE 0281-5, BS 6500,
NF C 32-201-5, PN-HD 21.5 S3

**PVC insulated and sheathed
flexible cords**

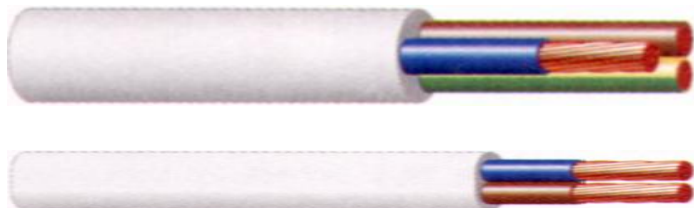

CONSTRUCTION

Conductors:	annealed copper, class 5 flexible conductor acc. to EN 60228
Insulation:	PVC type TI2
Sheath:	PVC type TM2

CHARACTERISTIC

Colour of sheath:	white, black, grey
Core identification:	
2-core:	blue, brown
3-core:	green-yellow, blue, brown
4-core:	green-yellow, brown, black, grey
5-core*:	green-yellow, blue, brown, black, grey
Maximum conductor operating temperature:	+70°C
Lowest ambient temperature for fixed installation:	-40°C
Lowest installation temperature:	-5°C
Maximum short-circuit conductor temperature:	+150°C
Minimum bending radius:	6 x D, D – overall diameter
Test voltage:	2000V
Flame retardant:	IEC 60332-1-2

*based on norm

APPLICATIONS

In domestic premises, kitchens, offices; for household appliances, including in damp premises; for medium duties (eg. washing machines, spin dryers, and refrigerators).

Standard length cable packing	500 or 1000m on drums. Other forms of packing and delivery are available on request
--------------------------------------	---

H03VV-F, 03VV-F*

H03VVH2-F, 03VVH2-F*

300/500V



DIN VDE 0281-5, BS 6500,
NF C 32-201-5, PN-HD 21.5 S3

H03VV-F, 03VV-F*

Number and cross-sectional area of conductor	Maximum diameter of wires in conductor	Nominal thickness of insulation	Nominal thickness of sheath	Approximate overall diameter	Approximate net weight of cables	Maximum conductor resistance at temperature 20°C
n x mm ²	mm	mm	mm	mm	kg/km	Ω/km
2x0,5	0,21	0,5	0,6	5,0	34	39,0
2x0,75	0,21	0,5	0,6	5,4	41	26,0
2x1*	0,21	0,5	0,6	5,6	47	19,5
2x1,5*	0,25	0,5	0,9	6,8	70	13,3
3x0,5	0,21	0,5	0,6	5,3	40	39,0
3x0,75	0,21	0,5	0,6	5,7	50	26,0
3x1*	0,21	0,5	0,6	5,9	58	19,5
3x1,5*	0,25	0,5	0,9	7,2	85	13,3
4x0,5	0,21	0,5	0,6	5,8	49	39,0
4x0,75	0,21	0,5	0,6	6,3	61	26,0
5x0,75*	0,21	0,5	0,7	7,1	79	26,0

*based on norm

H03VVH2-F, 03VVH2-F*

Number and cross-sectional area of conductor	Maximum diameter of wires in conductor	Nominal thickness of insulation	Nominal thickness of sheath	Approximate overall diameter	Approximate net weight of cables	Maximum conductor resistance at temperature 20°C
n x mm ²	mm	mm	mm	mm	kg/km	Ω/km
2x0,5	0,21	0,5	0,6	3,1 x 5,1	25	39,0
2x0,75	0,21	0,5	0,6	3,3 x 5,4	31	26,0
2x1*	0,21	0,5	0,6	3,4 x 5,6	36	19,5
2x1,5*	0,25	0,6	0,8	4,3 x 7,0	55	13,3

*based on norm

H03VV-F, 03VV-F*

H03VVH2-F, 03VVH2-F*

300/500V

DIN VDE 0281-5, BS 6500,
NF C 32-201-5, PN-HD 21.5 S3




Current rating

Cross-section, mm ²	Current ratings in Ampere (A)	
	Single phase	Three phase
0,5	3	3
0,75	6	6

These values apply to the majority of cases. Further information should be sought in unusual cases e.g.:

- when high ambient temperatures are involved, ie. above 30°C
- where long lengths are used
- where ventilation is restricted

where the cords are used for other purposes, eg. internal wiring of apparatus.

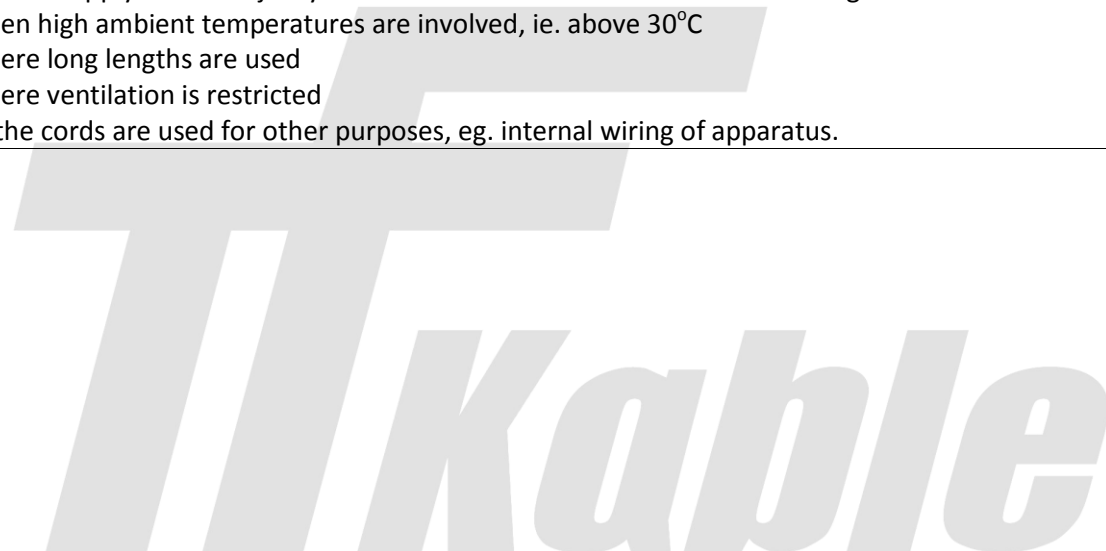

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.