

PS 1 RF KNX


Item no.: 4941625



KNX
Flush-mounted actuators

Description

- KNX push-button switching actuator module, KNX RF, Data Secure
- 4 touch points
- Can be used universally in many 55 mm switch programmes
- Quick and easy conversion of conventional installations
- 1-gang or 2-gang rockers required as separate accessories (article numbers 9080026, 9080027)
- Secure commissioning and communication through support of KNX Data Secure

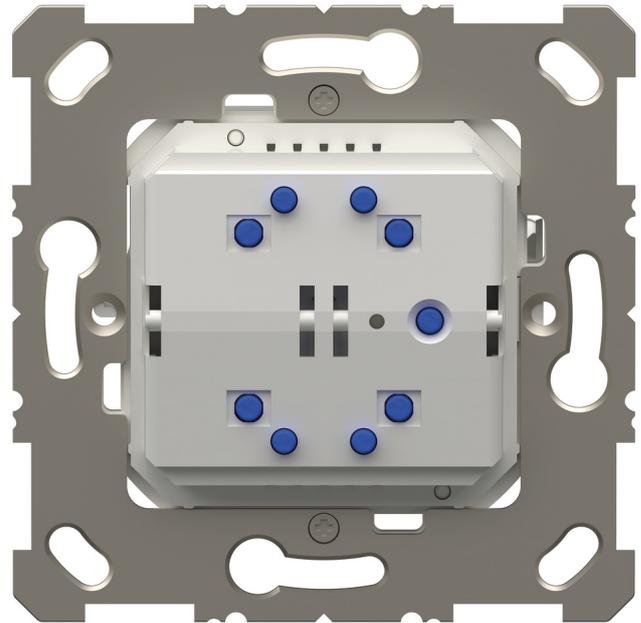

Technical data

PS 1 RF KNX	
Operating voltage KNX	Busspannung
Operating voltage	230 V AC - 240 V AC, 50 Hz - 60 Hz
Frequency	50 - 60 Hz
Installation type	Flush-mounted
Type of connection	Screw terminals
Number of channels	1
Type of contact	10 A
Incandescent/halogen lamp load	1800 W

PS 1 RF KNX	
Halogen lamp load	1800 W
LED lamp < 2 W	50 W
LED lamp 2-8 W	600 W
LED lamp > 8 W	600 W
Inrush current	max. 740 A / 200 µs
Protection class	II

Subject to technical changes and misprints

additional information at: www.theben.de/product/4941625


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

PS 1 RF KNX


Item no.: 4941625



Connection example



Scale drawings

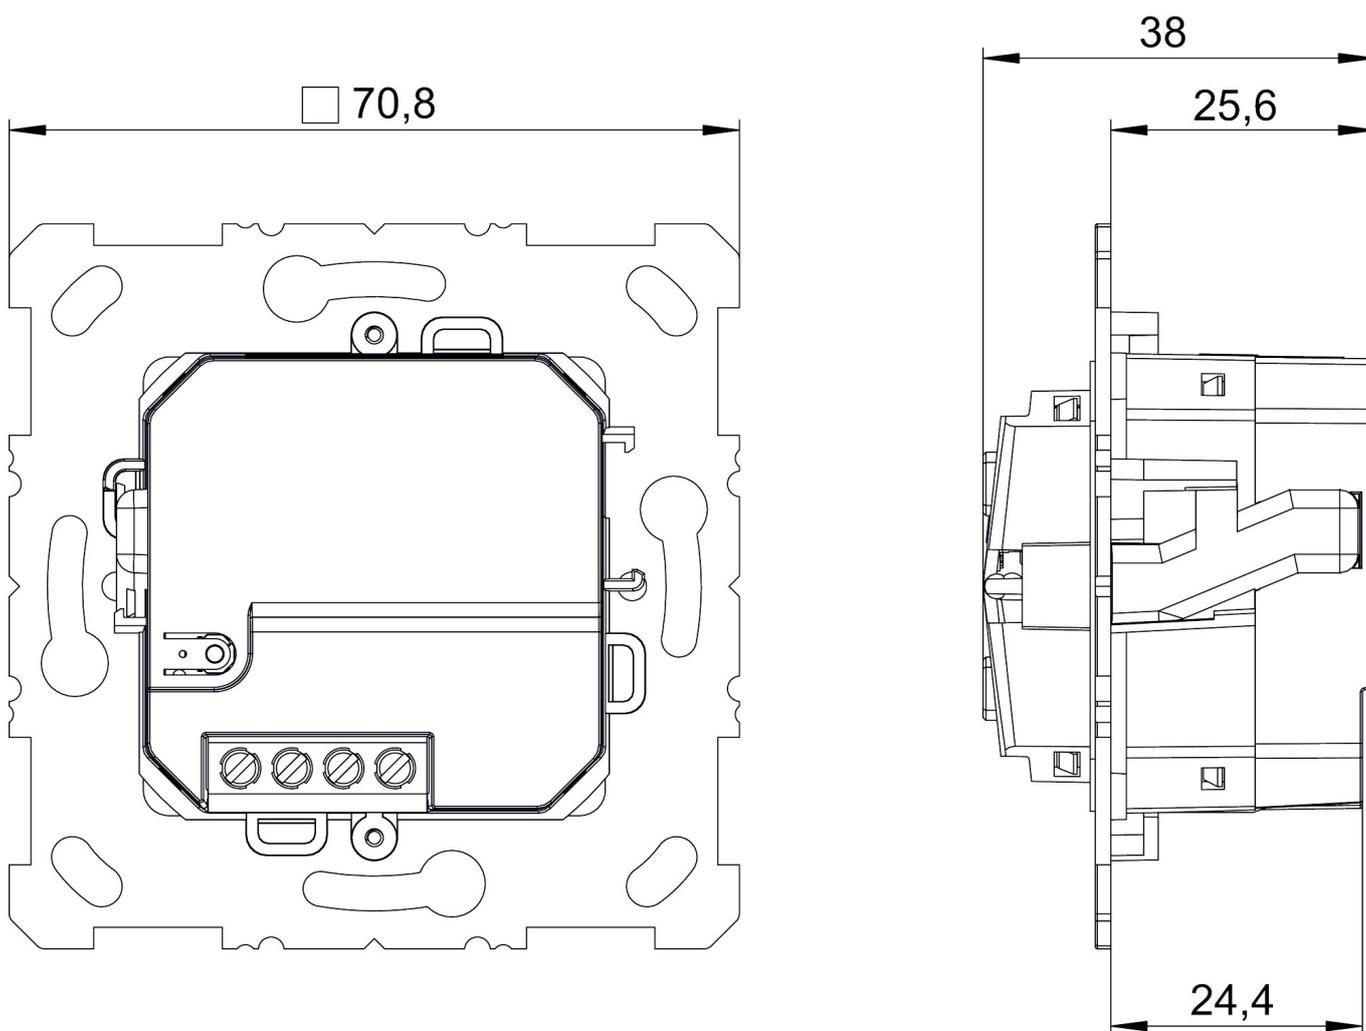

Subject to technical changes and misprints

additional information at: www.theben.de/product/4941625

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

23/12/2025

Page 2 of 3

PS 1 RF KNX

Item no.: 4941625



Accessories

Rocker 1-way WH

Item no.: 9080026



Rocker 2-way WH

Item no.: 9080027



Subject to technical changes and misprints

additional information at: www.theben.de/product/4941625

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

23/12/2025

Page 3 of 3