


PCE data sheet

| | |
|------------------------|--|
| article# | 535-7 |
| article description | CEE-wall mounted plug 63A 5p 7h IP67 POWER TWIST |
| description long | CEE-wall mounted plug 63A5p 7h IP67 POWER TWIST housing material: PC/ABS rated current: 63A number of poles: 5 (3P+N+PE) clock-position: 7h rated voltage/frequency: 277/480V~ - 288/500V~ / 50+60Hz contacts: brass nickel plated, with pilot pin connection technology: frame terminals with screws IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399220340 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.914 kg |
| packaging quantity | 1 |
| minimum order quantity | 1 |

| | |
|---------------------------|------------------------|
| ETIM 7.0 | EC001319 |
| IEC-amperage | 63 A |
| Voltage acc. EN 60309-2 | 500 V (50+60 Hz) black |
| Number of poles | 5 |
| Clock hour position | 7 h |
| Identification colour | Black |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Construction type | Surface mounted plug |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface finish contacts | Nickel-plated |

| | |
|--------------------|----------------------|
| wire flexible | 6-16 mm ² |
| wire solid | 6-25 mm ² |
| contact screws | 200 Ncm |
| dismantling length | 100 mm |
| stripping length | 15-18 mm |

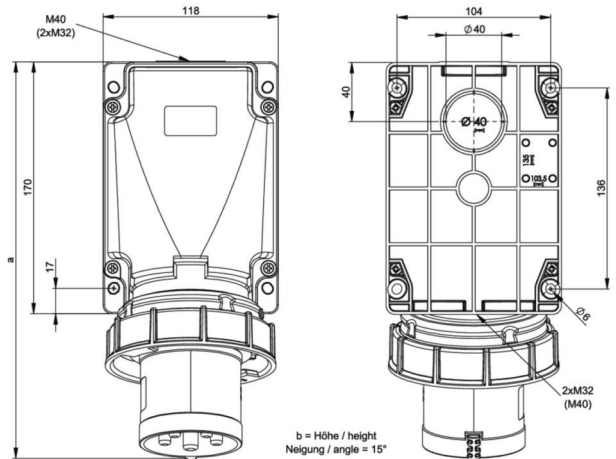

www.manufacturer-safety.info