

LUXORliving J4

Item no.: 4800450



Smart Home

Actuators DIN rail and gateways

Description

- 4-way blind actuator LUXORliving
- For controlling drives for blinds, shutters, sun and vision protection devices
- Manual operation on device
- LED Up and Down switching status display for each channel
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>



Technical data

LUXORliving J4	
Operating voltage KNX	<10 mA
Operating voltage	110 - 240 V AC
Stand-by consumption	<0.3 W
Number of channels	4
Width	4 modules
Installation type	DIN rail

LUXORliving J4	
Output	NO contact, 6 A
Switching output	Potential-free, for SELV, if the whole device switches SELV
Type of protection	IP 20
Protection class	II according to EN 60 669

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800450

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025


Page 1 of 2

LUXORliving J4


Item no.: 4800450

theben

Connection example



Scale drawings

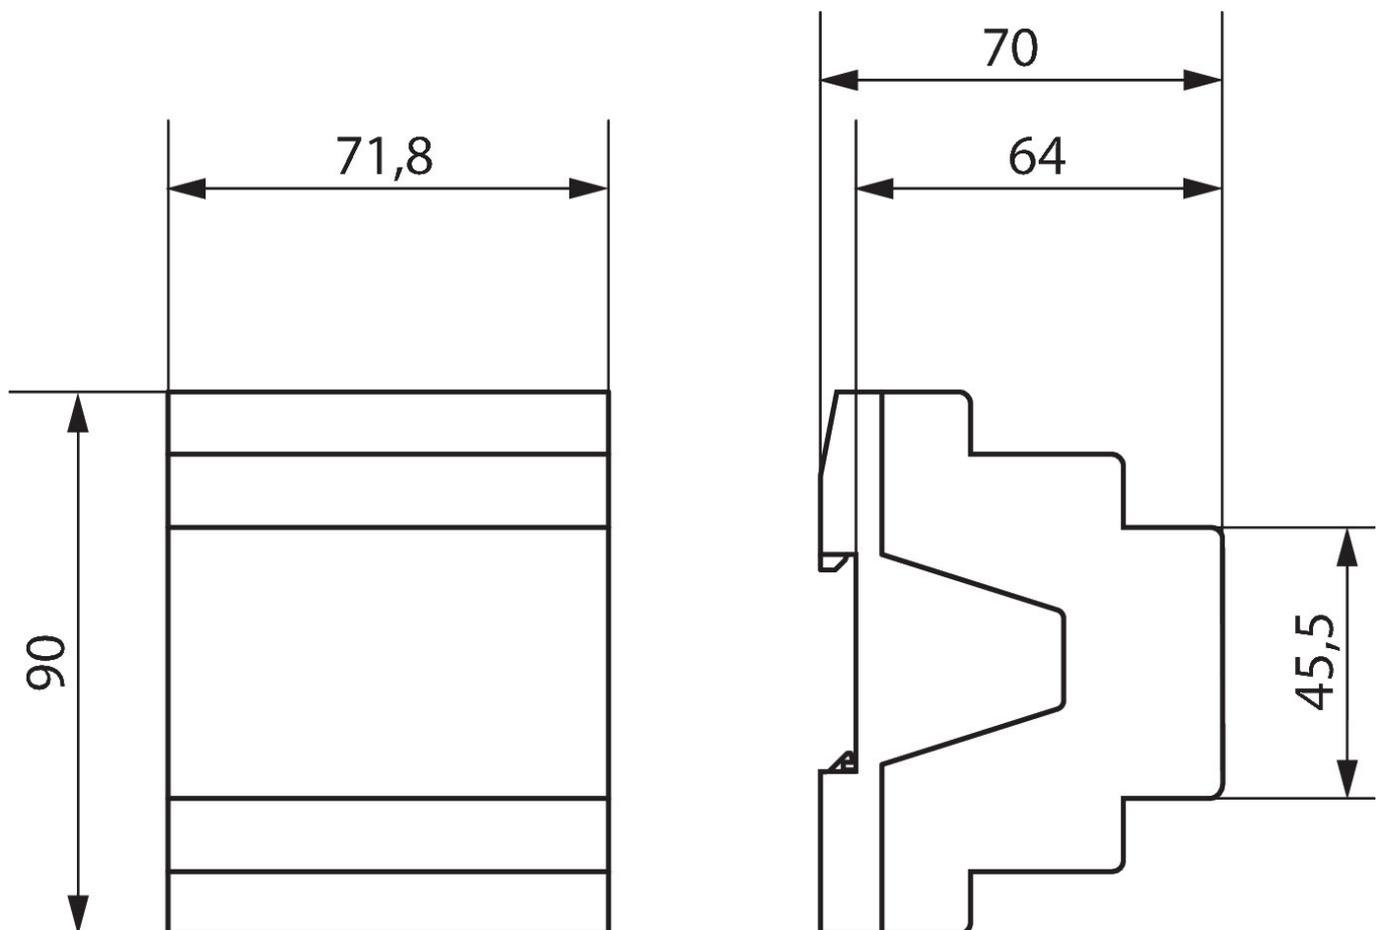

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800450

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025

Page 2 of 2