

LUXORliving J8

Item no.: 4800455



Smart Home

Actuators DIN rail and gateways

Description

- 8-way blind actuator LUXORliving
- For controlling drives for blinds, shutters, sun and vision protection devices
- Manual operation on device
- LED Up and Down switching status display for each channel
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>




Technical data

LUXORliving J8	
Operating voltage KNX	<10 mA
Operating voltage	110 - 240 V AC
Stand-by consumption	<0.5 W
Number of channels	8
Width	8 modules
Installation type	DIN rail

LUXORliving J8	
Output	NO contact, 6 A
Switching output	Potential-free, for SELV, if the whole device switches SELV
Type of protection	IP 20
Protection class	II according to EN 60 669

Connection example

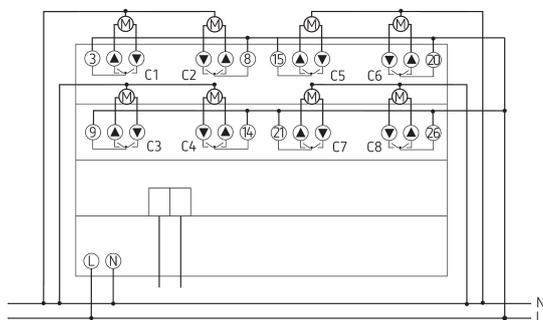

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800455


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

LUXORliving J8

Item no.: 4800455

theben

Scale drawings

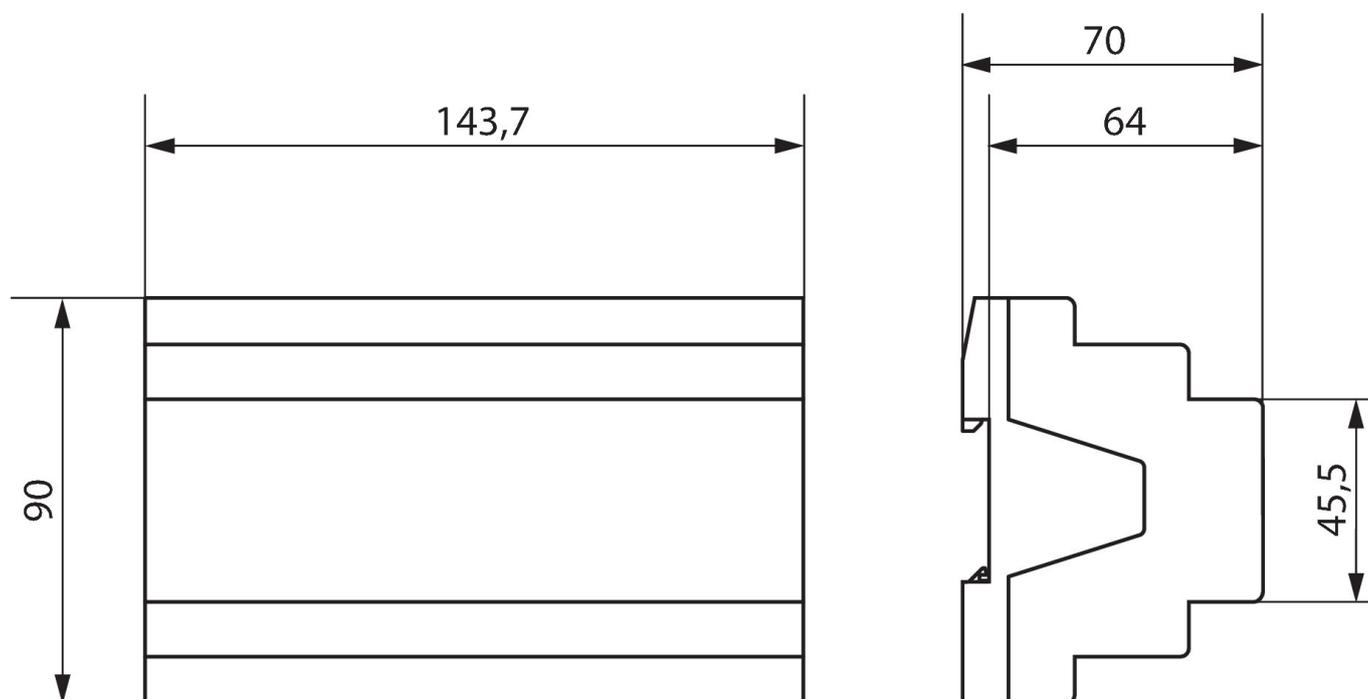

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800455

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025

Page 2 of 2