

NORTE L LED1X10500 D576 T840 ALU L60 SPORT • 1112098



Product:	Norte L LED1x10500 D576 T840 ALU L60 SPORT
Order code:	1112098
Family:	Norte L LED SPORT
Product group:	Highbays

GENERAL DATA

Description:	Surface mounted high-bay LED luminaire Light distribution type: direct Optical system: lenses, silicone rubber gasket, impact resistance Housing: aluminium Colour: white (RAL9003)
Installation:	On the ceiling or wall. Push-in terminal, 5x2x2.5mm2
Environment	Indoor
Application	industry, warehouse, hall, sports, transport terminal

ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	58.7
Power factor:	>0,95	Control gear:	ECG on/off
Connection:	Push-in terminal, 5x2x2.5mm2		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm (ta+25°C):	9480	System efficacy, lm/W:	162
CRI (Ra):	80+	CCT, K:	4000
SDCM:	3	Light Distribution:	Symmetrical medium beam (31°...75°)
Distribution Type:	Direct	Beam angle, °:	50
UGR index:	≤22	LED lifetime, h:	100000/L80B50


TECHNICAL DATA

Net weight, kg:	2.8	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.016543345	Pallet quantity, pcs:	50
Dimensions, mm:	435x343x93		


STANDARDS

Operating temperature range, °C:	-20...+40 C	Protection class IEC:	I
Ingress protection code:	IP65	Mechanical impact resistance:	IK10
Protection symbol:	D	EEC:	A++
Certificates:	CE, RoHS	Warranty:	3 years

Technical drawing (.jpg)

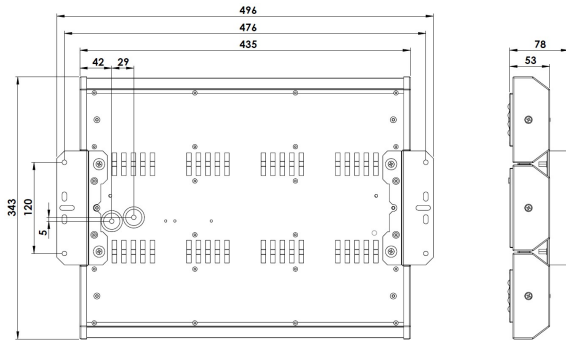

Light distribution curve (.jpg)

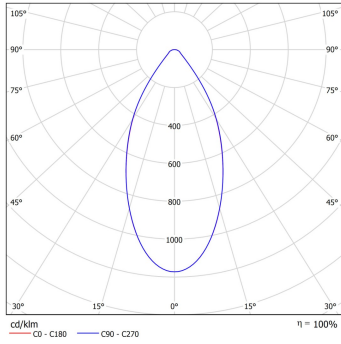

Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Date of issue: 2021-11-12 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org