



# CoreLine surface-mounted

## SM136V 28S\_34S\_40S/830 PSU W20L120 NOC

830 warm white - Power supply unit

CoreLine surface-mounted delivers on the CoreLine promise of innovative, easy-to-use, high-quality luminaires. The high-quality CoreLine surface-mounted is designed to replace existing surface-mounted luminaires with T8 or T5 technology. This family features an innovative new choice of multiple lumen outputs in one single luminaire, called MultiLumen. Instant energy savings and a longer lifetime, make this is an environmentally friendly and cost saving solution. With a quick-connector feature, our surface-mounted luminaires are simple and easy to install. Also available within the range are Interact Ready luminaires with integrated wireless communications, fully compatible with Interact gateways, sensors and software.

### Warnings and Safety

- The product is IPX0 & as such is not protected against water ingress & as such we strongly recommend that The environment in which The luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips / Signify cannot guarantee safe failure & product warranty will become void

### Product data

General Information			
Beam angle of light source	- °	Driver included	Yes
Light source color	830 warm white	Optic type	Beam angle 100°
Light source replaceable	No	Luminaire light beam spread	100°
Number of gear units	1 unit	Control interface	-
Driver/power unit/transformer	Power supply unit	Connection	Connection unit 3-pole
		Cable	Cable with connector 3-pole

## CoreLine surface-mounted

Protection class IEC	Safety class I
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	CE mark
ENEC mark	ENEC mark
Warranty period	5 years
Constant light output	No
Number of products on MCB of 16 A type B	35
Photobiological risk	Photobiological risk group 0 @ 200mm to EN62471
EU RoHS compliant	Yes
Service tag	No
Unified glare rating CEN	25

### Light Technical

Saturated Red (R9)	<50
--------------------	-----

### Operating and Electrical

Input Voltage	220 to 240 V
Input Frequency	50 or 60 Hz
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	15.3 A
Inrush time	0.29 ms
Power Factor (Min)	0.9

### Controls and Dimming

Dimmable	No
----------	----

### Mechanical and Housing

Housing Material	Steel
Reflector material	Polycarbonate
Optic material	Polycarbonate
Optical cover/lens material	Polymethyl methacrylate
Fixation material	Steel
Optical cover/lens finish	Diamond
Overall length	1200 mm
Overall width	200 mm
Overall height	68.5 mm
Color	White
Dimensions (Height x Width x Depth)	69 x 200 x 1200 mm (2.7 x 7.9 x 47.2 in)

### Approval and Application

Ingress protection code	IP20/44 [ Finger-protected; wire-protected, splash-proof]
Mech. impact protection code	IK03 [ 0.3 J]

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	2800 3400 4000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	130 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.43, 0.40) SDCM ≤3
Initial input power	22 26 31 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life	5 %
50000 h	
Lumen maintenance at median useful life*	L80
50000 h	

### Application Conditions

Ambient temperature range	-10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Not applicable


### Product Data

Full product code	871951451230600
Order product name	SM136V 28S_34S_40S/830 PSU W20L120 NOC
EAN/UPC - Product	8719514512306
Order code	911401881681
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	911401881681
Net Weight (Piece)	3.800 kg




# CoreLine surface-mounted

## Dimensional drawing

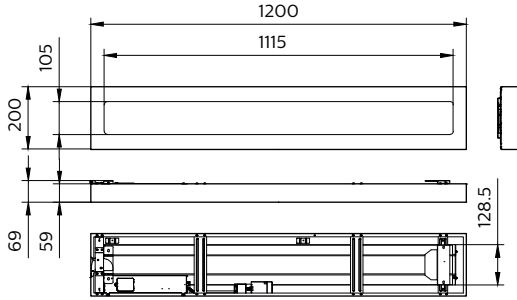


CoreLine Surface-mounted SM134V


## Photometric data

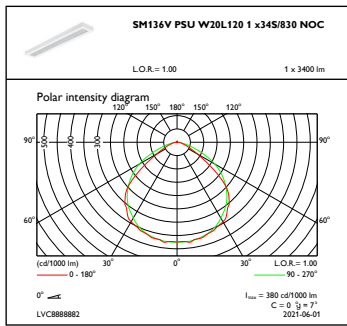


OFPC1\_SM136VPSUW20L1201x345830NOC



OFPC1\_SM136VPSUW20L1201x405830NOC

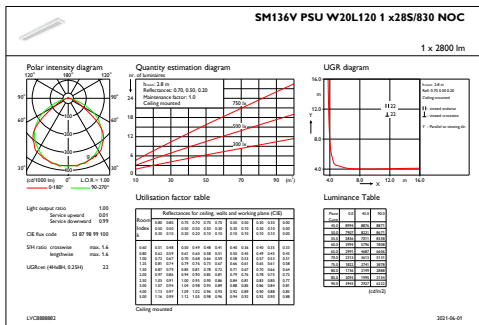



IFGU1\_SM136VPSUW20L1201x285830NOC

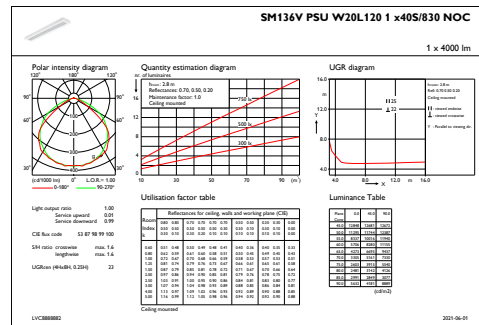

IFGU1\_SM136VPSUW20L1201x405830NOC

# CoreLine surface-mounted

## Photometric data

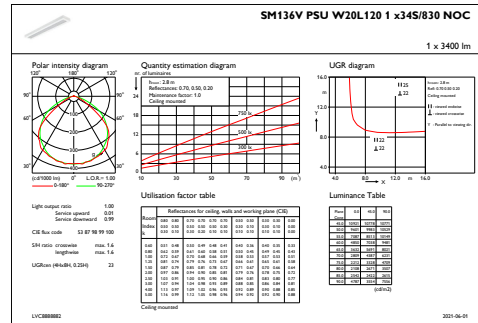

OFPC1\_SM136VPSUW20L1201x285830NOC

IFGU1\_SM136VPSUW20L1201x345830NOC

