
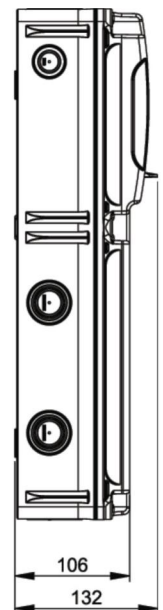


PCE data sheet

| | |
|------------------------|---|
| article# | 15850600 |
| article description | Empty enclosure FLEX 6-E IP66/67 |
| description long | Empty Enclosure for Low-Voltage Switchgear Assemblies FLEX 6-E Material: ABS, color: grey (similar to RAL 7035) Dimensions (HxBxT): 471x160x132mm Lockabel, transparent hinged window with 6 units Closed (blind) version (no openings for sockets) Incl. accessories (DIN rail mounted, hinge straps, screws, screw covers) Protection degree: IP66/IP67 Acc. to IEC/EN 62208 |
| GTIN (EAN) | 9003399522666 |
| country of origin | PL |
| customs number | 85381000 |
| net weight | 1.400 kg |
| packaging quantity | 1 |
| minimum order quantity | 1 |

| | |
|--------------------------------------|---------------------------|
| ETIM 8.0 | EC000058 |
| Mounting method | Surface mounted (plaster) |
| Type of cover | Cover |
| Height | 471 mm |
| Width | 160 mm |
| Depth | 132 mm |
| Internal depth | 72 mm |
| Colour | Grey |
| RAL-number | 7035 |
| Number of modules | 6 |
| Number of rows | 1 |
| Number of openings for flange plates | 0 |
| Number of conduit inlets | 8 |
| Material housing | Plastic |
| Suitable for outdoor use | True |
| Degree of protection (IP) | IP67 |
| Protection class | II |
| Impact strength | IK10 |

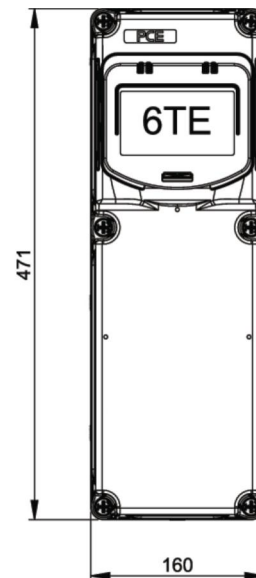

<https://www.pcelectric.at/shop/en/?func=detail&artnr=15850600>



www.manufacturer-safety.info