


BOREAS CL

Discharge Floodlight with Clips and Asymmetric Reflector

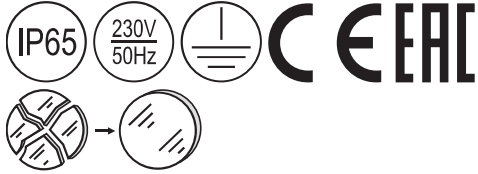

Type: A range of discharge floodlights with asymmetric reflector and aluminium clips. IP65 – water and dust protection for use in adverse conditions.

Specification: Faceted asymmetric reflector in anodized aluminium. Clear glass diffuser with aluminium clips. Body in aluminium in dark grey finish. Luminaire is plastic-wrapped and boxed individually.

Installation: Suitable for any horizontal and/or vertical surfaces.

Application: Outdoor. Efficient floodlight for building facades and perimeters, billboards, displays, car parks, etc.

Name	Lamp (W) and holder	Overall dimensions (LxWxH), mm	Weight, kg	Total wattage, W
Boreas 1150 K54 CL HI	1x150 (E27)	500x420x145	7	168
Boreas 1250 K55 CL HI	1x250 (E40)	500x420x145	8,2	280
Boreas 1400 K56 CL HI	1x400 (E40)	500x420x145	9	440
Boreas 1150 K54 CL HS	1x150 (E40)	500x420x145	7	168
Boreas 1250 K55 CL HS	1x250 (E40)	500x420x145	8,2	280
Boreas 1400 K56 CL HS	1x400 (E40)	500x420x145	9	440

Options available on request:

- TIM – Timed ignitor
- HF – High Frequency control gear
- HI – For metal halide lamp
- HS – For high pressure sodium lamp

BOREAS 1250 K55 CL HI

