


INDUS

IP54 Plastic Luminaire

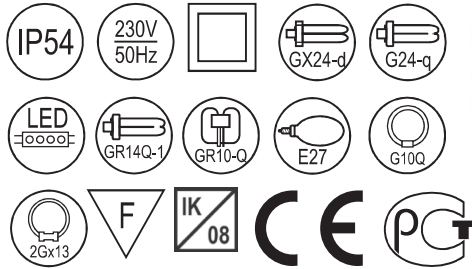

Type:	Surface-mounted fluorescent luminaire with rounded profile.
Specification:	Opal PC IP54 diffuser with quick lock system. White thermoplastic body with steel reflector. Luminaire is boxed individually.
Installation:	Designed to be fixed onto ceilings or walls of any type, including flammable surfaces.
Application:	Ideal for common areas in hospitals, colleges and other similar institutions.

Type	Lamp (W) and socket	IP level	Overall dimensions, mm	Weight, kg	Total wattage, W
Indus 1E27 M23	max. 100W (E27)	IP54	Ø300x120	0,8	-
Indus 209 M24	2x9 (TC-S, G23)	IP54	Ø300x120	1,1	32
Indus 113 M25	1x13 (G24d-1)	IP54	Ø300x120	1,1	19
Indus 118 M26	1x18 (G24d-2)	IP54	Ø300x120	1,15	26
Indus 126 M27	1x26 (G24d-3)	IP54	Ø300x120	1,2	34
Indus 213 M28	2x13 (G24d-1)	IP54	Ø300x120	1,45	38
Indus 218 M29	2x18 (G24d-2)	IP54	Ø300x120	1,5	52
Indus 122 M30	1x22 (T9 C, G10Q)	IP54	Ø300x120	1,25	30
Indus 122 M31 HF	1x22 (T5 FC, 2Gx13)	IP54	Ø300x120	0,95	25
Indus 114 P97 HF	1x14 (GR14Q-1)	IP54	Ø300x120	0,95	17
Indus 117 P98 HF	1x17 (GR14Q-1)	IP54	Ø300x120	0,95	19
Indus 214 P99 HF	2x14 (GR14Q-1)	IP54	Ø300x120	1	33
Indus 116 P95 HF	1x16 (GR10Q)	IP54	Ø300x120	0,95	17
Indus 128 P96 HF	1x28 (GR10Q)	IP54	Ø300x120	1	29

Options available on request:

HF	- High Frequency control gear	5TB	- 5 way terminal block for loop feed and ease of wiring
DIM	- Dimmable ballast 1-10V	NCP	- Low Power Factor
SWITCHDIM	- Switch DIM ballast	MW	- MW sensor
DALI	- DALI ballast	T830	- Color temperature 3000K
EMG	- Emergency version 1 hour	T840	- Color temperature 4000K
EM2	- Emergency version 2 hours	T857	- Color temperature 5700K
EM3	- Emergency version 3 hours		



INDUS LED1X1050 B183 T840 MW

Type	IP level	Overall dimensions, mm	Luminous flux, lm	Color temperature, K	Color rendering, Ra	Total wattage, W	Weight, kg
Indus LED1x660 B249 T830 ECO	IP54	Ø300x120	660	3000	>80	9	1
Indus LED1x1120 B453 T830 ECO	IP54	Ø300x120	1120	3000	>80	18	1
Indus LED1x1050 B183 T840	IP54	Ø300x120	1050	4000	>80	11	1
Indus LED1x1300 B184 T840	IP54	Ø300x120	1300	4000	>80	13	1
Indus LED1x1800 B454 T840	IP54	Ø300x120	1800	4000	>80	18	1
Indus LED1x2400 B455 T840	IP54	Ø300x120	2400	4000	>80	24	1,2

INDUS 218 M29 HF

