


Sensor/actuator combinations, wireless  
Sensor/blind actuator, 2/1gang, wireless  
for ABB-free@home®

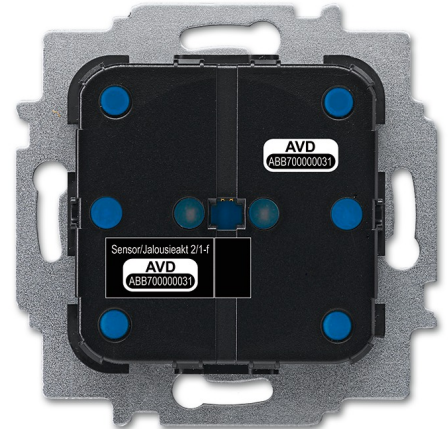

For controlling blind or awning motors.  
Communication with the free@home system is carried out wireless.  
With integrated blind actuator.  
Blind function is available also without prior programming (left sensor channel is pre-configured).  
Configuration can be changed later via the web interface (groups, scenes, etc.).  
The right sensor channel for programming additional functions (groups, scenes, etc.).  
For contacting 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx.  
3 wire connection (neutral conductor required).  
With two 230 V extension unit inputs (Up/Down).  
With fixing claws.

Control element: Switch contacts top/bottom, Display elements: LED as light for orientation or display of the switching state,  
Rated voltage: 230 V~, Rated frequency: 50 Hz / 60 Hz,  
Outputs: 2 Normally open contact, potential-bound, Suitable for: Operation mode Blind, Rated current: 4 A,  
Output voltage: 230 V~, Rated power: 920 VA  
Protection class (Device): IP 20, Temperature range (Device): -5 °C to 45 °C,  
Dimensions: (L x W x D): 71 mm x 71 mm x 45 mm, Mounting depth: 32 mm,  
Programming via the web interface of the System Access Point., Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current Online-Catalogue.

Order Code : 2CKA006200A0080  
Article No. : SBA-F-2.1.1-WL  
EAN: 4011395215692