


Sensor/actuator combinations
Switch actuator sensor, 2/1gang
for ABB-free@home®

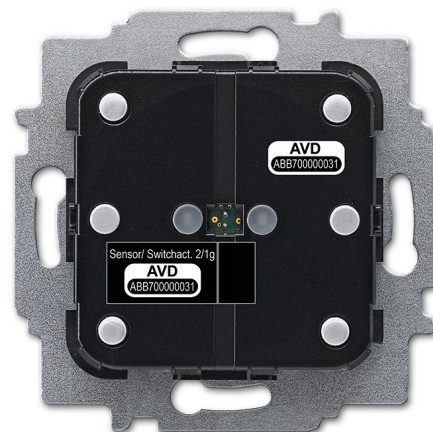

For switching 127 V~/230 V~ consumers.

With integrated switch actuator.

Switching function is available also without prior programming (left sensor channel is pre-configured).

Configuration can be changed later via the web interface (groups, scenes, etc.).

The right sensor channel for programming additional functions (groups, scenes, etc.).

For contacting 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx.

The bus can be connected via enclosed terminal block.

When installing in the flush-mounted box, a spatial division between the bus cable and 127 V/230 V installation cable is to be adhered to! If this minimum distance is not possible, use electronic boxes or insulating tubes.

Control element: Switch contacts top/bottom, Display elements: LED as light for orientation or display of the switching state,

Bus voltage: 24 V,

Outputs: 1 Normally open contact, potential free, Suitable for: ohmic, Rated current: 10 A, Output voltage: 230 V~, Rated power: 2300 W, Suitable for: capacitive, Rated current: 10 AX, Rated power: 2300 VA, Suitable for: inductive, Rated current: 10 AX, Rated power: 2300 VA

Protection class (Device): IP 20, Temperature range (Device): -5 °C to 45 °C,

Dimensions: (L x W x D): 71 mm x 71 mm x 45 mm, Mounting depth: 32 mm,

Programming only with bus voltage applied via the web interface of the System Access Point., Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current Online-Catalogue.

Order Code : 2CKA006220A0124

Article No. : SSA-F-2.1.1

EAN: 4011395180129