



# CorePro GLASS LED candles and lusters

## CorePro LEDLusterND6.5-60W P45 E27827FRG

Featuring a classic heritage design, Classic filament LED Lamps combine the familiar shapes of classic incandescent bulbs with the benefits of the long-lasting LED technology. An very easy choice for people who are looking for the replacement for retrofit LED candles and lusters, as comparing with conventional lamps, it provide 90% energy saving. CorePro Glass LED candles and lusters provides excellent quality of light. By offering a lifetime of 15,000 hours it reduces maintenance costs.

### Product data

| General information                   |                     |
|---------------------------------------|---------------------|
| Cap-Base                              | E27 [ E27]          |
| EU RoHS compliant                     | Yes                 |
| Nominal Lifetime (Nom)                | 15000 h             |
| Switching Cycle                       | 20000X              |
| Flux measurement reference            | Sphere              |
| Light technical                       |                     |
| Color Code                            | 827 [ CCT of 2700K] |
| Luminous Flux (Nom)                   | 806 lm              |
| Color Designation                     | Warm White (WW)     |
| Correlated Color Temperature (Nom)    | 2700 K              |
| Luminous Efficacy (rated) (Nom)       | 124.00 lm/W         |
| Color Consistency                     | <6                  |
| Color Rendering Index (Nom)           | 80                  |
| LLMF At End Of Nominal Lifetime (Nom) | 70 %                |
| Operating and electrical              |                     |
| Input Frequency                       | 50 to 60 Hz         |
| Power (Nom)                           |                     |
| Lamp Current (Nom)                    | 50 mA               |
| Wattage Equivalent                    |                     |
| Starting Time (Nom)                   | 0.5 s               |
| Warm Up Time to 60% Light (Nom)       | 0.5 s               |
| Power Factor (Nom)                    |                     |
| Voltage (Nom)                         |                     |
| Power Factor (Nom)                    | 0.55                |
| Voltage (Nom)                         | 220-240 V           |
| Temperature                           |                     |
| T-Case Maximum (Nom)                  | 55 °C               |
| Controls and dimming                  |                     |
| Dimmable                              | No                  |
| Mechanical and housing                |                     |
| Bulb Finish                           | Frosted             |
| Bulb Shape                            | P45 [ P 45mm]       |

# CorePro GLASS LED candles and lusters

## Approval and application

|                               |        |
|-------------------------------|--------|
| Energy Efficiency Class       | E      |
| Energy Consumption kWh/1000 h | 7 kWh  |
| EPREL Registration Number     | 387452 |

## Product data

|                    |   |
|--------------------|---|
| Full product code  | 871951434768700                             |
| Order product name | CorePro LEDLusterND6.5-60W P45<br>E27827FRG |

EAN/UPC - Product 8719514347687

Order code 929002029292


Numerator - Quantity Per Pack 1

Numerator - Packs per outer box 10

Material Nr. (12NC) 929002029292

Net Weight (Piece) 0.012 kg



## Dimensional drawing

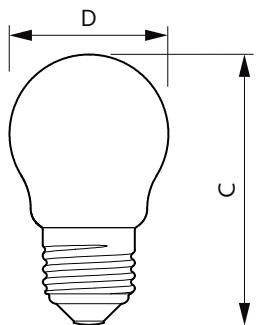

| Product                                  | D     | C     |
|--|-------|-------|
| CorePro LEDLusterND6.5-60W P45 E27827FRG | 45 mm | 78 mm |

CorePro LEDLusterND6.5-60W P45 E27827FRG

## Photometric data

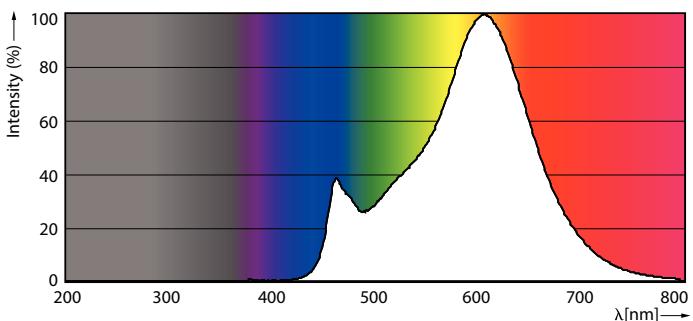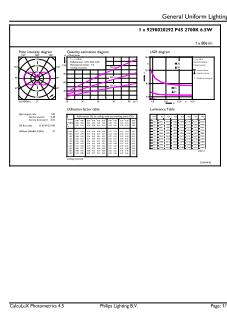


LEDluster E27 P45 827 FR

LEDbulb 6,5-60W E14 B35


## CorePro GLASS LED candles and lusters

### Photometric data

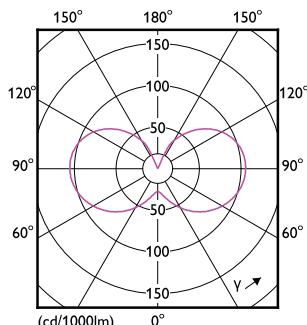


LEDbulb 6,5-60W E14 P45

### Lifetime

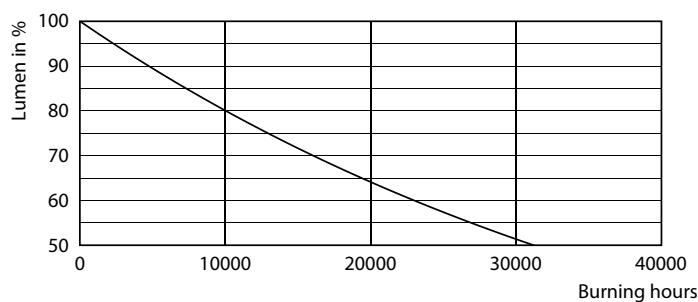

LEDbulb 6,5-60W E14 B35

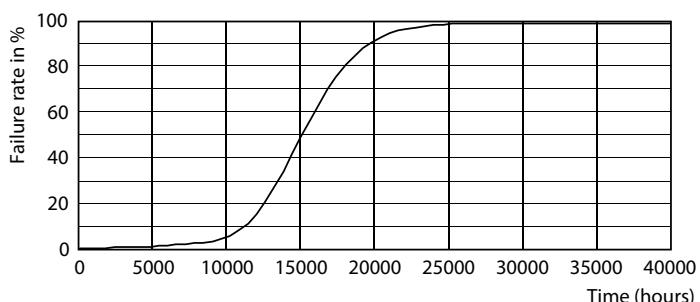

LEDbulb 6,5-60W E14 B35

