


## PCE data sheet

|                        |   |
|------------------------|---|
| article#               | <b>044-9</b>  |
| article description    | <b>CEE-plug 125A 4p 9h IP67 POWER TWIST</b>   |
| description long       | CEE-plug 125A 4p 9h IP67 POWER TWIST<br>housing material: PA6<br>rated current: 125A<br>number of poles: 4 (3P+PE)<br>clock-position: 9h<br>rated voltage/frequency: 200-250V~ / 50+60Hz<br>contacts: brass nickel plated, with pilot pin<br>connection technology: frame terminals with screws<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399048531   |
| country of origin      | AT  |
| customs number         | 85366990  |
| packaging quantity     | 2   |
| minimum order quantity | 2   |

|                            |                           |
|----------------------------|---------------------------|
| ETIM 7.0                   | EC000140                  |
| IEC-amperage               | 125 A                     |
| Number of poles            | 4                         |
| Voltage acc. EN 60309-2    | 200-250 V (50+60 Hz) blue |
| Clock hour position        | 9 h                       |
| Identification colour      | Blue                      |
| RAL-number                 | 7046                      |
| Degree of protection (IP)  | IP67                      |
| Connection system          | Screwed terminal          |
| Cable entry                | Swivel                    |
| Angle of plug              | Straight                  |
| Material                   | Plastic                   |
| Contact material           | CuZn                      |
| Surface treatment contacts | Nickel-plated             |

|                    |                       |
|--------------------|-----------------------|
| a                  | 270 mm                |
| b                  | 131 mm                |
| K (cable Ø)        | 22,5-50 mm            |
| SW                 | 81 mm                 |
| wire flexible      | 16-50 mm <sup>2</sup> |
| contact screws     | 450 Ncm               |
| strain relief      | 1500 Ncm              |
| dismantling length | 100 mm                |
| stripping length   | 24-27 mm              |

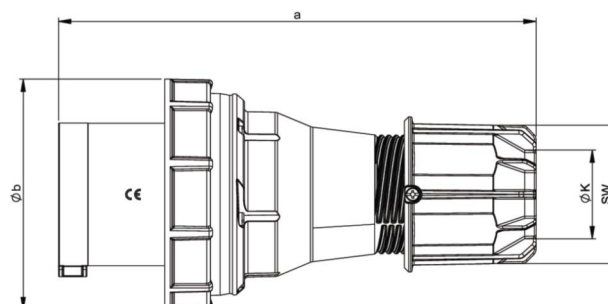

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)