





# LED 2.2W 300mm S14D WW ND 1CT/4

Philips LEDtube integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

#### **Product data**

General information					
Cap-Base	S14D [ S14d]				
EU RoHS compliant	Yes				
Nominal Lifetime (Nom)	30000 h				
Switching Cycle	50000X				
Technical Type	2.2-35W				
Flux measurement reference	Sphere				
Light technical					
Color Code	827 [ CCT of 2700K]				
Beam Angle (Nom)	140 °				
Luminous Flux (Nom)	250 lm				
Color Designation	Warm White (WW)				
Correlated Color Temperature (Nom)	2700 K				
Luminous Efficacy (rated) (Nom)	113.00 lm/W				
Color Consistency	<6				
Color Rendering Index (Nom)	80				
LLMF At End Of Nominal Lifetime (Nom) 70 %					
Operating and electrical					
Input Frequency	50 to 60 Hz				
Power (Nom)	2.2 W				
Lamp Current (Nom)	22 mA				


Starting Time (Nom)	0.5 s			
Warm Up Time to 60% Light (Nom)	0.5 s			
Power Factor (Nom)	0.4			
Voltage (Nom)	220-240 V			
Temperature				
T-Ambient (Max)	45 °C			
T-Ambient (Min)	-20 °C			
T-Storage (Max)	65 ℃			
T-Storage (Min)	-40 °C			
T-Case Maximum (Nom)	30 ℃			
Controls and dimming				
Dimmable	No			
Mechanical and housing				
Bulb Finish	Frosted			
Bulb Material	Plastic			
Product Length	300 mm			
Bulb Shape	Others			
Approval and application				
Energy Efficiency Class	E			

Datasheet, 2022, January 12 data subject to change

Energy Saving Product	Yes			
Approval Marks	RoHS compliance CE marking KEMA Keur			
	certificate			
Energy Consumption kWh/1000 h	3 kWh			
EPREL Registration Number	387347			
Product data				
Full product code	871951426362800			
Order product name	LED 2.2W 300mm S14D WW ND 1CT/4			

EAN/UPC - Product	8719514263628
Order code	929002444001
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929002444001
Net Weight (Piece)	0.100 kg


## Dimensional drawing

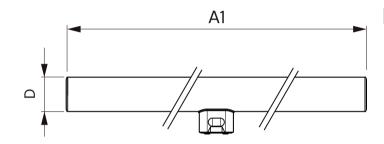


Product	D1	D2	A1	A2	А3
LED 2.2W 300mm S14D WW ND 1CT/4	30 mm	30 mm	266.8 mm		299 mm

LED 2.2W 300mm S14D WW ND 1CT/4

### Photometric data

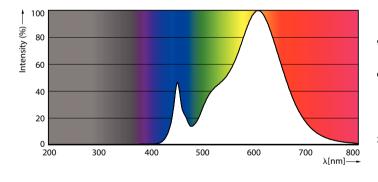




LEDtube 2,2W S14S 250lm 827

LEDtube 2,2W S14S 250lm


#### Photometric data




Calculus Photometrics 4.5 Philips Lighting Scy. Pages 191


LEDtube 2,2W S14D 250lm 827

#### Lifetime

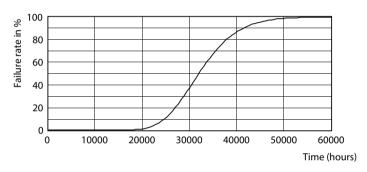


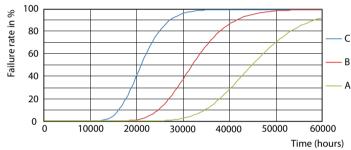

#### LEDtube 30K

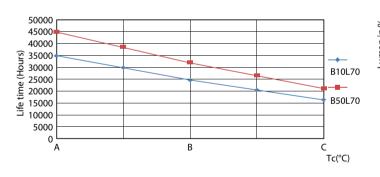


# LEDtube 30K FailureRate

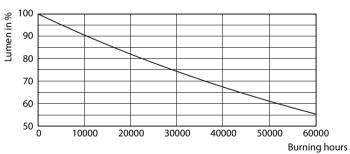

LEDtube 30K LifetimeVsTc

LEDtube 30K

#### Lifetime

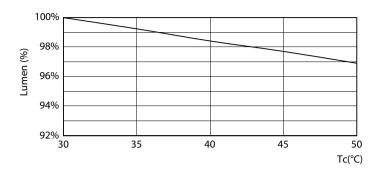

LEDtube S14 30K LumenVsTc

