

CORRIDOR S 3PLED C329 LOA • 1019598


Product:	Corridor S 3PLED C329 LOA
Order code:	1019598
Family:	Corridor S LED
Product group:	Emergency lighting

GENERAL DATA

Description:	Surface mounted LED emergency escape luminaire Light distribution type: direct Optical system: lenses Housing: polycarbonate Colour: white Battery charging time: 24 hours Battery: NiCd, deep discharge protection
Installation:	On the ceiling or wall. Screw terminal, 3x2x2.5mm2
Environment	Indoor
Application	escape route lighting

ELECTRICAL DATA

Mains voltage:	220-240V, 50-60Hz	System power*, W:	3
Power factor:	>0,60	Control gear:	ECG on/off
Illumination mode:	M/NM	Emergency operating time, h:	3
Connection:	Screw terminal, 3x2x2.5mm2		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm:	410	CRI (Ra):	80+
lm(ta+25°C):			
CCT, K:	6500	SDCM:	5
Light Distribution:	Symmetrical wide beam (76°...125°)	Distribution Type:	Direct
Beam angle, °:	165	LED lifetime, h:	50000/L80B50


TECHNICAL DATA

Net weight, kg:	0.7	Quantity in package, pcs:	1
Packaging volume, m³/pcs:	0.0009879408	Pallet quantity, pcs:	300
Dimensions, mm:	132x132x54		


STANDARDS

Operating temperature range, °C:	ta 0...+40	Protection class IEC:	II
Ingress protection code:	IP41	Mechanical impact resistance:	IK07
Certificates:	CE, RoHS	Warranty:	2 years

[Technical drawing \(.jpg\)](#)

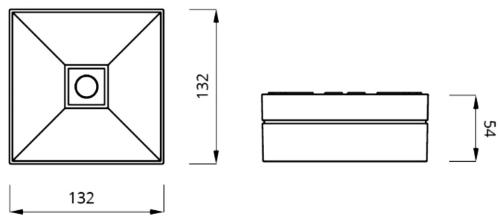

Light distribution curve (.jpg)

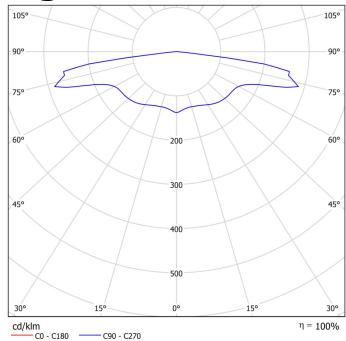

Note:

*: M-maintained (with an option of connecting as non-maintained), NM- non-maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data: $\pm 10\%$, values apply to an ambient temperature of 25°C

Date of issue: 2022-05-09 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org