

GAMMA LED BASIC 280 1000LM 840 IP54 II KL. OPAL (10W) 280MM

BULKHEADS

LED GO!



220-240 V | LED |  IP54 | IK10

TECHNICAL PARAMETERS

Index:	226779
Ingress protection:	IP54
Impact resistance:	IK10
Nominal power [W]:	10
Luminous flux [lm]*:	1000
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	A+
Material of the body:	pp
Diffuser material:	PC

*Tolerance +/- 10%


CHARACTERISTICS

Surface mounted, round LED light fitting, ingress protection class IP54 and an integrated energy-saving light source LED GO!. White base; diffuser made of impact resistant PC provides even light distribution and ensures a high impact resistance class (IK10). Additional overvoltage protection (SP500V).

APPLICATION

Surface mounted fitting intended for indoor use in representative rooms and passageways (large conference halls, hotel corridors, studies). Designed for mounting on ceilings and walls. Wide range of diameters and two diffuser versions allow for the same fitting to be used in rooms with different parameters. Well suited to be used as a basic or general interior light source.

LIGHT CURVES

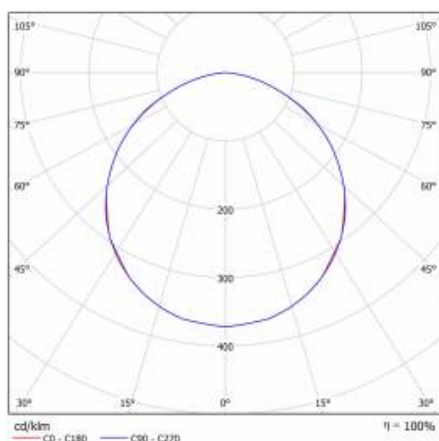

GAMMA LED BASIC 280 1000LM 840 IP54 II KL. OPAL (10W) 280MM

BULKHEADS

LEDGO!

TECHNICAL PARAMETERS TABLE

Light source:	LEDGO!	Mounting dimensions [mm]:	167
Nominal power [W]:	10	Impact resistance:	IK10
Rated power of the luminaire [W]:	9	Ingress protection:	IP54
Supply voltage [V]:	220 - 240	Mounting version:	surface
Frequency [Hz]:	50 - 60	Working temperature [°C]:	od -10°C do +25°C
Luminous flux [lm]:	1000	Dimensions of single box [mm]:	285/75/285
Luminous efficacy [lm/W]:	98	Net weight of the luminaire [kg]:	0.380
Energy efficiency class:	A+	Index:	226779
Electrical protection class:	II	EAN:	5905963226779
Colour temperature [K]:	4000	Category type:	bulkheads
Colour rendering index:	>80	Version:	280
SDCM:	≤ 3	Vandalproof:	yes
Diffuser material:	PC	Luminaire power [W]:	10
Diffuser type:	OPAL	AC voltage range [V]:	220-240
Diffuser colour:	white	Light distribution type:	lambertian
Material of the body:	pp	CE certificate:	15/2019
Colour of the body:	white	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Dimensions [mm]:	72/280		

*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-03-11



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



15/2019