

# PRODUCT FAMILY DATASHEET

## OUTDOOR FACADE EDGE

Slim LED luminaires with high light output and optional sensor



---

### AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

---

### PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

---

### PRODUCT FEATURES

- Very bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Available with and without motion sensor
- Available in two housing colors: white and dark gray
- Diffuser made of opal polycarbonate with clear glass cover







TECHNICAL DATA

Product description	Electrical data	Luminaire control gear data			Photometric data	Light technical data	Dimensions & weight		
	Nominal wattage	Max. no. of lum. on circuit break. B16 A	Max. no. of lum. on circuit break. C10 A	Max. no. of lum. on circuit break. C16 A	Luminous flux	Beam angle	Length	Width	Height
O FACADE EDGE 12 W 3000 K IP54 GY	12.00 W	33	42	26	740 lm	110 °	168.0 mm	100.0 mm	273.0 mm
O FACADE EDGE 12 W 3000 K IP54 WT	12.00 W	33	42	26	770 lm	107.00 °	168.0 mm	100.0 mm	273.0 mm
O FACADE EDGE SENSOR 12 W 3000 K IP54 S GY	12.20 W	33	42	26	740 lm	107.00 °	168.0 mm	100.0 mm	273.0 mm
O FACADE EDGE SENSOR 12 W 3000 K IP54 S WT	12.20 W	33	42	26	770 lm	107.00 °	168.0 mm	100.0 mm	273.0 mm

Product description	Product weight	Colors & materials		Temperatures & operating conditions	Lifespan			
		Product color	Housing color	Ambient temperature range	Number of switching cycles	Lifespan L70/B50 at 25 °C	Lifespan L80/B10 at 25 °C	Lifespan L90/B10 at 25 °C
O FACADE EDGE 12 W 3000 K IP54 GY	1300.00 g	Gray	Gray	-20...+40 °C	15000	30000 h	- h	- h
O FACADE EDGE 12 W 3000 K IP54 WT	1300.00 g	White	White	-20...+40 °C	15000	30000 h	- h	- h
O FACADE EDGE SENSOR 12 W 3000 K IP54 S GY	1300.00 g	Gray	Gray	-20...+40 °C	15000	30000 h	- h	- h
O FACADE EDGE SENSOR 12 W 3000 K IP54 S WT	1300.00 g	White	White	-20...+40 °C	15000	30000 h	- h	- h

Product description	Additional product data		Capabilities
	Mounting type	Mounting location	Dimmable
O FACADE EDGE 12 W 3000 K IP54 GY	Surface	Wall	No
O FACADE EDGE 12 W 3000 K IP54 WT	Surface	Wall	No

Product description	Additional product data		Capabilities
	Mounting type	Mounting location	Dimmable
O FACADE EDGE SENSOR 12 W 3000 K IP54 S GY	Surface	Wall	No
O FACADE EDGE SENSOR 12 W 3000 K IP54 S WT	Surface	Wall	No

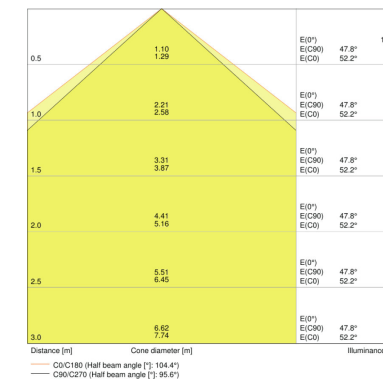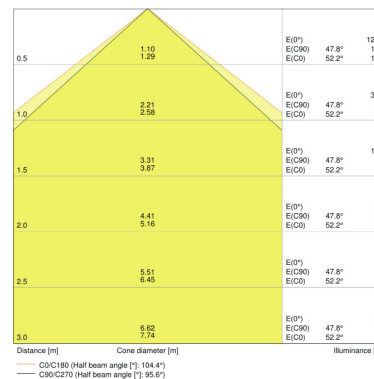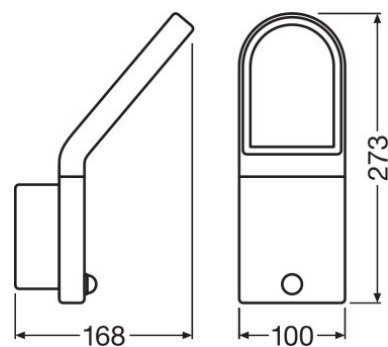
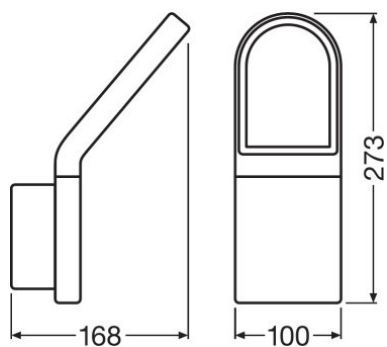


O FACADE EDGE 12 W 3000 K IP54 GY,  
O FACADE EDGE 12 W 3000 K IP54 WT

O FACADE EDGE SENSOR 12 W 3000 K IP54 S GY, O FACADE EDGE SENSOR 12 W 3000 K IP54 S WT

O FACADE EDGE 12 W 3000 K IP54 GY

O FACADE EDGE 12 W 3000 K IP54 WT

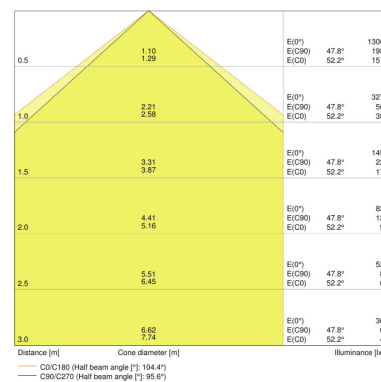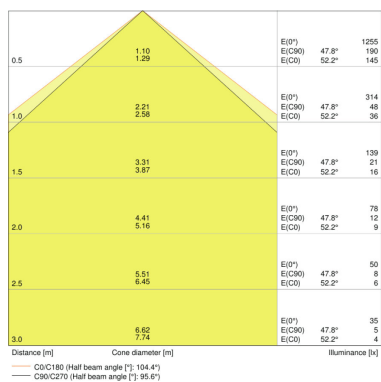

O FACADE EDGE SENSOR 12 W 3000 K  
IP54 S GY

O FACADE EDGE SENSOR 12 W 3000 K  
IP54 S WT

**EQUIPMENT / ACCESSORIES**

- Complete mounting and connecting accessories included

**APPLICATION ADVICE**

For more detailed application information and graphics please see product datasheet.

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075074767	Shipping carton box 4	425 mm x 285 mm x 315 mm	5822.00 g	38.15 dm <sup>3</sup>
4058075074781	Shipping carton box 4	425 mm x 285 mm x 315 mm	5822.00 g	38.15 dm <sup>3</sup>

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075074804	Shipping carton box 4	425 mm x 285 mm x 315 mm	5822.00 g	38.15 dm <sup>3</sup>
4058075074828	Shipping carton box 4	425 mm x 285 mm x 315 mm	5822.00 g	38.15 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

#### DISCLAIMER

— Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.