

PRODUCT FAMILY DATASHEET

OUTDOOR FACADE INDIRECT

Luminaires with rotatable head and indirect light



AREAS OF APPLICATION

- Outdoor
- Building facades
- Decorative illumination

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Available in two housing colors: white and dark gray
- Swivel angle: 90°
- Diffuser made of opal PMMA





TECHNICAL DATA


Product description	Electrical data	Luminaire control gear data			Photometric data	Light technical data	Dimensions & weight		
	Nominal wattage	Max. no. of lum. on circuit break. B16 A	Max. no. of lum. on circuit break. C10 A	Max. no. of lum. on circuit break. C16 A	Luminous flux	Beam angle	Diameter	Height	Product weight
O FACADE IND RD 13 W 3000 K IP54 GY	13.00 W	75	96	60	480 lm	240 °	150.0 mm	118.0 mm	790.00 g
LED FACADE INDIRECT 13 W 3000 K RD WT	13.00 W	75	96	60	640 lm	240 °	150.0 mm	118.0 mm	790.00 g

Product description	Colors & materials		Temperatures & operating conditions	Lifespan			
	Product color	Housing color	Ambient temperature range	Number of switching cycles	Lifespan L70/B50 at 25 °C	Lifespan L80/B10 at 25 °C	Lifespan L90/B10 at 25 °C
O FACADE IND RD 13 W 3000 K IP54 GY	Gray	Gray	-20...+40 °C	15000	30000 h	- h	- h
LED FACADE INDIRECT 13 W 3000 K RD WT	White	White	-20...+40 °C	15000	30000 h	- h	- h

Product description	Additional product data		Capabilities
	Mounting type	Mounting location	Dimmable
O FACADE IND RD 13 W 3000 K IP54 GY	Surface	Wall	No
LED FACADE INDIRECT 13 W 3000 K RD WT	Surface	Wall	No

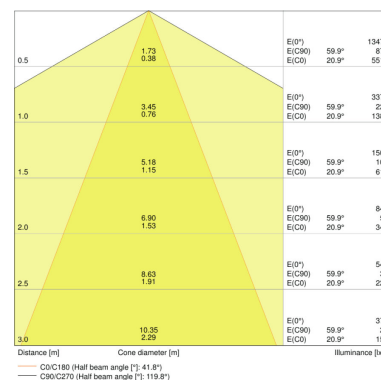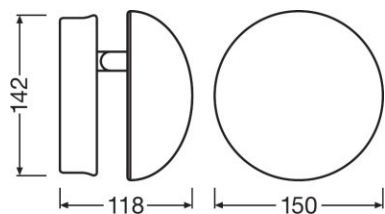

O FACADE IND RD 13 W 3000 K IP54 GY

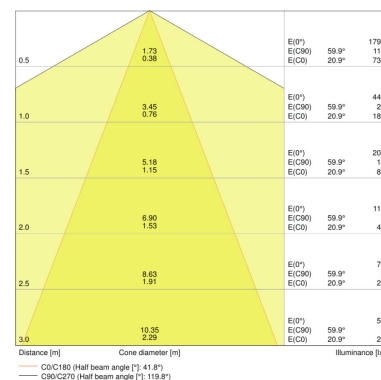

LED FACADE INDIRECT 13 W 3000 K RD WT

O FACADE IND RD 13 W 3000 K IP54 GY, LED FACADE INDIRECT 13 W 3000 K RD WT

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075075023	Shipping carton box 6	300 mm x 275 mm x 185 mm	5308.00 g	15.26 dm ³
4058075075047	Shipping carton box 6	300 mm x 275 mm x 185 mm	5308.00 g	15.26 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.