


**CETUS P LED1X1200 D671 T830 OP • 1024015**

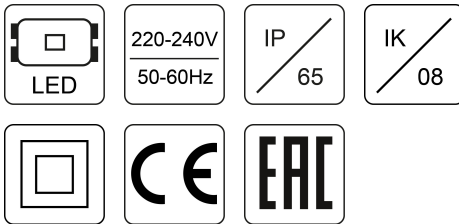

Product:	Cetus P LED1x1200 D671 T830 OP
Order code:	1024015
Family:	Cetus P LED
Product group:	Plastikiniai šviestuvai

**GENERAL DATA**

<b>Description:</b>	A surface-mounted LED luminaire with rounded profile and high impact resistance Diffuser: opal polycarbonate, high impact resistance Body: white polycarbonate
<b>Installation:</b>	Designed to be fixed onto ceiling or walls of any type, including flammable surfaces. Screw terminal, 2x1.5mm2
<b>Environment</b>	Indoor
<b>Application</b>	office, education, corridor, public place, household, staircase, bathroom, healthcare

**ELECTRICAL DATA**

<b>Mains voltage:</b>	220-240V, 50/60Hz	<b>System power*, W:</b>	12
<b>Power factor:</b>	>0,55	<b>Control gear:</b>	ECG on/off
<b>Connection:</b>	Screw terminal, 2x1.5mm2		

**LIGHTING DATA**

<b>Light source and cap, W:</b>	LED	<b>Light source included:</b>	yes
<b>Luminaire output*, lm (ta+25°C):</b>	1080	<b>System efficacy, lm/W:</b>	90
<b>CRI (Ra):</b>	80+	<b>CCT, K:</b>	3000
<b>Distribution Type:</b>	Direct	<b>LED lifetime, h:</b>	40000/L70B50


**TECHNICAL DATA**

<b>Net weight, kg:</b>	0.19	<b>Quantity in package, pcs:</b>	1
<b>Packaging volume, m3/pcs:</b>	0.0022338	<b>Pallet quantity, pcs:</b>	390

**STANDARDS**


<b>Operating temperature range, °C:</b>	ta -15...+35	<b>Protection class IEC:</b>	II
<b>Ingress protection code:</b>	IP65	<b>Mechanical impact resistance:</b>	IK08
<b>EEC:</b>	A+	<b>Certificates:</b>	CE, RoHS
<b>Warranty:</b>	3 years		

Technical drawing (.jpg)



L, mm	W, mm	D, mm
160	63	146

**Light distribution curve (.jpg)**



Date of issue: 2020-05-13 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org