

# TYTAN 2 LED 1450MM 7050LM 840 IP66 42W

## BATTENS




220-240 V | **LED** |  | **IK09** | 

### TECHNICAL PARAMETERS

|                          |        |
|--------------------------|--------|
| Index:                   | 909757 |
| Ingress protection:      | IP66   |
| Impact resistance:       | IK09   |
| Nominal power [W]:       | 42     |
| Luminous flux [lm]*:     | 7050   |
| Colour temperature [K]:  | 4000   |
| Energy efficiency class: | A++    |
| Material of the body:    | PC     |
| Colour of the body:      | grey   |
| Diffuser material:       | PC     |

\*Tolerance +/- 10%

### LIGHT CURVES

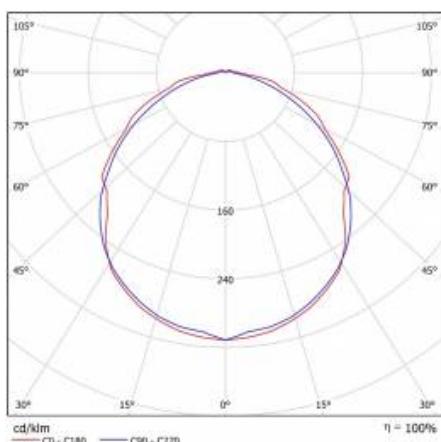

### CHARACTERISTICS

TYTAN 2 LED is a fitting from NEXT GEN line, which is a new generation of fittings in LED technology. The fitting, designed from scratch, allows new solutions improving the light distribution and temperature balance. Branded LED diodes and new LED modules have influence on a very high luminous efficacy: 155 lm/W. It guarantees the best required lighting level and energy saving up to 68%. The solution based on integration of the diffuser and LED module is applied in the fitting. The fitting has a lot of facilities making the mounting easier and faster: the system of diffuser suspension, adjustable mounting brackets ensuring the mounting tolerance +/-40mm. Standard equipment of the fitting: clips made of stainless steel (INOX).

### APPLICATION

The multifunctional LED lamp is designed for use in areas with high requirements for dust and water resistance. Especially recommended for lighting public facilities, including hospitals, educational facilities, halls, garages, passages, warehouses, shops, food industry, commercial and industrial facilities (factories, laboratories), warehouses, parking lots (underground and multi-level), sports stadiums, transport terminals and underground passages. The luminaire is ideal for new lighting applications as well as replacing traditional fluorescent luminaires with energy-saving LED solutions. Its design is adapted for surface and suspended mounting.

## TYTAN 2 LED 1450MM 7050LM 840 IP66 42W

## BATTENS

## TECHNICAL PARAMETERS TABLE

|                                   |               |                                   |   |
|-----------------------------------|---------------|-----------------------------------|---|
| Index:                            | 909757        | Mounting dimensions [mm]:         | 970   |
| EAN:                              | 5905963909757 | Impact resistance:                | IK09  |
| Light source:                     | LED module    | Ingress protection:               | IP66  |
| Nominal power [W]:                | 42            | Mounting version:                 | surface, suspended  |
| Rated power of the luminaire [W]: | 45.32         | Working temperature [°C]:         | from -20 to +35   |
| Supply voltage [V]:               | 220-240       | Net weight of the luminaire [kg]: | 2.010   |
| Frequency [Hz]:                   | 50 - 60       | Mark D:                           | yes   |
| Luminous flux [lm]:               | 7050          | Category type:                    | battens   |
| Luminous efficacy [lm/W]:         | 156           | Category of application:          | industrial  |
| Energy efficiency class:          | A++           | AC voltage range [V]:             | 220 - 240   |
| Electrical protection class:      | I             | LED lifespan L70B50 [h]:          | 116000  |
| Colour temperature [K]:           | 4000          | LED lifespan L80B20 [h]:          | 73000   |
| Colour rendering index:           | >80           | LED lifespan L90B10 [h]:          | 35000   |
| SDCM:                             | ≤ 3           | Photobiological safety:           | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Power factor:                     | 0.96          | Warranty [years]:                 | 5   |
| Exchangeable source:              | yes           |                                   |   |
| Diffuser material:                | PC            |                                   |   |
| Diffuser type:                    | MAT           |                                   |   |
| Material of the body:             | PC            |                                   |   |
| Colour of the body:               | grey          |                                   |   |
| Dimensions [mm]:                  | 1432/85/80    |                                   |   |

## TECHNICAL DETAILS



regulowane uchwyty / adjustable handles / einstellbare Halterungen



system zwieszania klosza / suspension system of the diffuser / hängende Diffusor



wybór miejsca zasilania / choosing a place of power supply / Stromversorgungsanschluss von mehreren Seiten möglich

\*Tolerance +/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2020-06-19



Lena Lighting S.A.  
ul. Konińska 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



91/2020