


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                    |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>2132-10v</b>                                                                                                                                                                                                                                                                                    |
| article description    | <b>CEE-connector 16A 3p 10h IP67 SHARK</b>                                                                                                                                                                                                                                                         |
| description long       | CEE-connector 16A 3p 10h IP67 SHARK<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (2P+PE)<br>clock-position: 10h<br>rated voltage/frequency: >50V~ / 100-300Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP66/IP67 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                 |
| customs number         | 85366990                                                                                                                                                                                                                                                                                           |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                 |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                 |

|                           |                             |
|---------------------------|-----------------------------|
| ETIM 7.0                  | EC001320                    |
| IEC-amperage              | 16 A                        |
| Number of poles           | 3                           |
| Voltage acc. EN 60309-2   | 50-500 V (100-300 Hz) green |
| Clock hour position       | 10 h                        |
| Identification colour     | Green                       |
| Degree of protection (IP) | IP67                        |
| Connection system         | Screwed terminal            |
| Angle of plug             | Straight                    |
| Cable entry               | Swivel                      |
| Material                  | Plastic                     |
| Contact material          | CuZn                        |
| Surface finish contacts   | Nickel-plated               |

|                    |                       |
|--------------------|-----------------------|
| a                  | 132 mm                |
| b                  | 78 mm                 |
| K (cable Ø)        | 6-15 mm               |
| SW                 | 42 mm                 |
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| contact screws     | 100 Ncm               |
| strain relief      | 500 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 10-12 mm              |

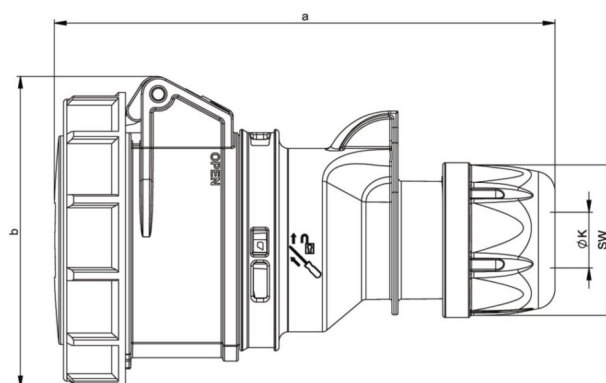

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)