


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                    |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>2132-7v</b>                                                                                                                                                                                                                                                                                     |
| article description    | <b>CEE-connector 16A 3p 7h IP67 SHARK</b>                                                                                                                                                                                                                                                          |
| description long       | CEE-connector 16A 3p 7h IP67 SHARK<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (2P+PE)<br>clock-position: 7h<br>rated voltage/frequency: 480-500V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP66/IP67 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                 |
| customs number         | 85366990                                                                                                                                                                                                                                                                                           |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                 |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                 |

|                           |                        |
|---------------------------|------------------------|
| ETIM 7.0                  | EC001320               |
| IEC-amperage              | 16 A                   |
| Number of poles           | 3                      |
| Voltage acc. EN 60309-2   | 500 V (50+60 Hz) black |
| Clock hour position       | 7 h                    |
| Identification colour     | Black                  |
| Degree of protection (IP) | IP67                   |
| Connection system         | Screwed terminal       |
| Angle of plug             | Straight               |
| Cable entry               | Swivel                 |
| Material                  | Plastic                |
| Contact material          | CuZn                   |
| Surface finish contacts   | Nickel-plated          |

|                    |           |
|--------------------|-----------|
| a                  | 132 mm    |
| b                  | 78 mm     |
| K (cable Ø)        | 6-15 mm   |
| SW                 | 42 mm     |
| wire flexible      | 1-2,5 mm² |
| contact screws     | 100 Ncm   |
| strain relief      | 500 Ncm   |
| dismantling length | 50 mm     |
| stripping length   | 10-12 mm  |

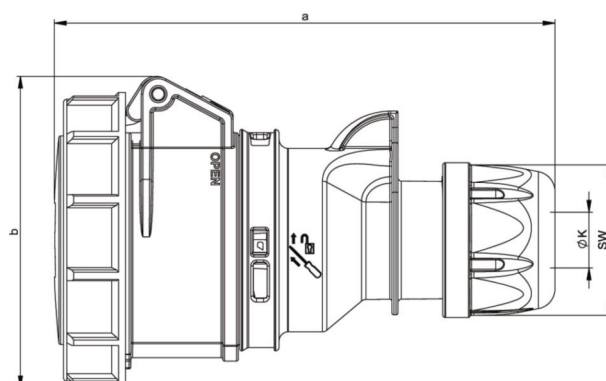

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)