


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>2242-9ttv</b>                                                                                                                                                                                                                                                                                               |
| article description    | <b>CEE-connector 32A 4p 9h IP67 SHARK TT</b>                                                                                                                                                                                                                                                                   |
| description long       | CEE-connector 32A 4p 9h IP67 SHARK TT<br>housing material: PA6<br>rated current: 32A<br>number of poles: 4 (3P+PE)<br>clock-position: 9h<br>rated voltage/frequency: 200-250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screwless terminals (TT)<br>IP protection class: IP66/IP67 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                             |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                       |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                             |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                             |

|                           |                           |
|---------------------------|---------------------------|
| ETIM 7.0                  | EC001320                  |
| IEC-amperage              | 32 A                      |
| Number of poles           | 4                         |
| Voltage acc. EN 60309-2   | 200-250 V (50+60 Hz) blue |
| Clock hour position       | 9 h                       |
| Identification colour     | Blue                      |
| Degree of protection (IP) | IP67                      |
| Connection system         | Screw less terminal       |
| Angle of plug             | Straight                  |
| Cable entry               | Swivel                    |
| Material                  | Plastic                   |
| Contact material          | CuZn                      |
| Surface finish contacts   | Nickel-plated             |

|                    |            |
|--------------------|------------|
| a                  | 163 mm     |
| b                  | 96 mm      |
| K (cable Ø)        | 11,5-20 mm |
| SW                 | 50 mm      |
| wire flexible      | 2,5-6 mm²  |
| strain relief      | 600 Ncm    |
| dismantling length | 50 mm      |
| stripping length   | 12-14 mm   |

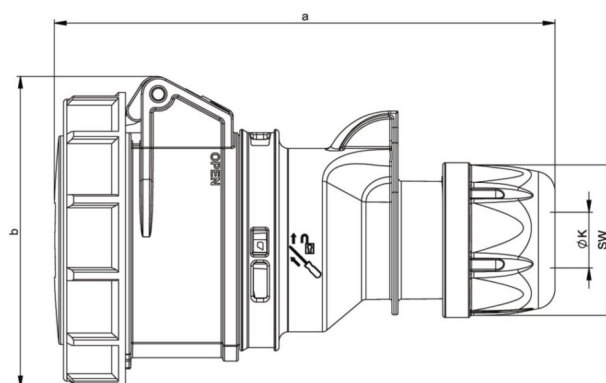

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)