


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                              |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>2331-2</b>                                                                                                                                                                                                                                                                                                                |
| article description    | <b>CEE-connector 63A 3p 2h IP44 POWER TWIST</b>                                                                                                                                                                                                                                                                              |
| description long       | CEE-connector 63A 3p 2h IP44 POWER TWIST<br>housing material: PA6<br>rated current: 63A<br>number of poles: 3 (2P+PE)<br>clock-position: 2h<br>rated voltage/frequency: >50V~ / 300-500Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>IP protection class: IP44 |
| GTIN (EAN)             | 9003399942808                                                                                                                                                                                                                                                                                                                |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                           |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                     |
| packaging quantity     | 2                                                                                                                                                                                                                                                                                                                            |
| minimum order quantity | 2                                                                                                                                                                                                                                                                                                                            |

|                           |                              |
|---------------------------|------------------------------|
| ETIM 7.0                  | EC001320                     |
| IEC-amperage              | 63 A                         |
| Number of poles           | 3                            |
| Voltage acc. EN 60309-2   | 50-500 V (>300-500 Hz) green |
| Clock hour position       | 2 h                          |
| Identification colour     | Green                        |
| RAL-number                | 7046                         |
| Degree of protection (IP) | IP44                         |
| Connection system         | Screwed terminal             |
| Angle of plug             | Straight                     |
| Cable entry               | Swivel                       |
| Material                  | Plastic                      |
| Contact material          | CuZn                         |
| Surface finish contacts   | Untreated                    |

|                    |                      |
|--------------------|----------------------|
| a                  | 269 mm               |
| b                  | 107 mm               |
| K (cable Ø)        | 14,5-36 mm           |
| SW                 | 61 mm                |
| wire flexible      | 6-16 mm <sup>2</sup> |
| contact screws     | 200 Ncm              |
| strain relief      | 1500 Ncm             |
| dismantling length | 100 mm               |
| stripping length   | 15-18 mm             |

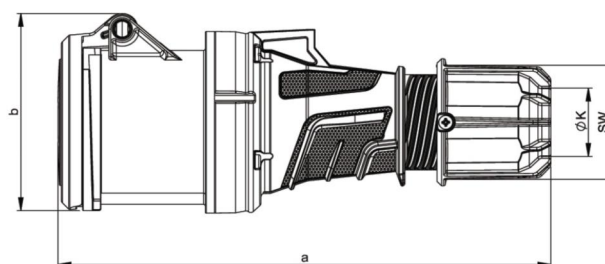

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)