


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>80232-6ttv</b>                                                                                                                                                                                                                                                                                              |
| article description    | <b>CEE angled plug 32A 3p 6h IP67 TT TWIST</b>                                                                                                                                                                                                                                                                 |
| description long       | CEE angled plug 32A 3p 6h IP67 TT TWIST<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 3 (2P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200-250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screwless terminals (TT)<br>IP protection class: IP67 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                             |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                       |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                             |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                             |

|                            |                       |
|----------------------------|-----------------------|
| ETIM 8.0                   | EC000140              |
| IEC-amperage               | 32 A                  |
| Number of poles            | 3                     |
| Voltage acc. EN 60309-2    | 230 V (50+60 Hz) blue |
| Clock hour position        | 6 h                   |
| Identification colour      | Blue                  |
| Degree of protection (IP)  | IP67                  |
| Connection system          | Screw less terminal   |
| Cable entry                | Swivel                |
| Angle of plug              | Angled                |
| Material                   | Plastic               |
| Contact material           | CuZn                  |
| Surface treatment contacts | Nickel-plated         |

|                    |            |
|--------------------|------------|
| a                  | 126 mm     |
| b                  | 93 mm      |
| c                  | 110 mm     |
| d                  | 25 °       |
| K (cable Ø)        | 11,5-20 mm |
| SW                 | 50 mm      |
| wire flexible      | 2,5-6 mm²  |
| strain relief      | 600 Ncm    |
| dismantling length | 50 mm      |
| stripping length   | 12-14 mm   |

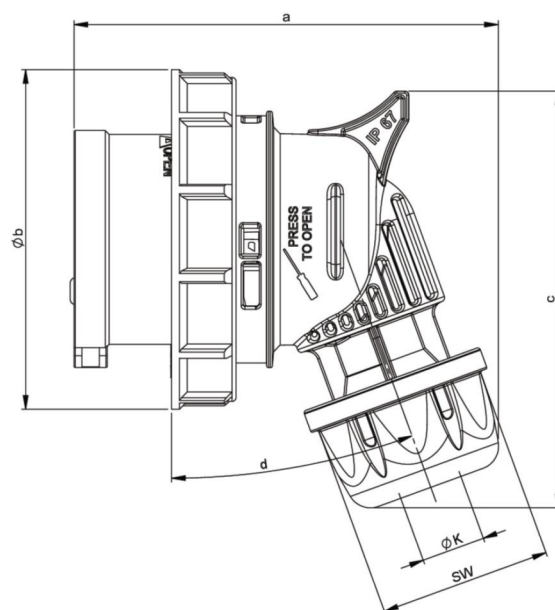

<https://www.pcelectric.at/shop/en/?func=detail&artnr=80232-6ttv>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)