


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>8023-9ttv</b>                                                                                                                                                                                                                                                                                               |
| article description    | <b>CEE angled plug 32A 3p 9h IP44 TT TWIST</b>                                                                                                                                                                                                                                                                 |
| description long       | CEE angled plug 32A 3p 9h IP44 TT TWIST<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 3 (2P+PE)<br>clock-position: 9h<br>rated voltage/frequency: 380-415V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screwless terminals (TT)<br>IP protection class: IP44 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                             |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                       |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                             |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                             |

|                            |                          |
|----------------------------|--------------------------|
| ETIM 8.0                   | EC000140                 |
| IEC-amperage               | 32 A                     |
| Number of poles            | 3                        |
| Voltage acc. EN 60309-2    | 380-415 V (50+60 Hz) red |
| Clock hour position        | 9 h                      |
| Identification colour      | Red                      |
| Degree of protection (IP)  | IP44                     |
| Connection system          | Screw less terminal      |
| Cable entry                | Swivel                   |
| Angle of plug              | Angled                   |
| Material                   | Plastic                  |
| Contact material           | CuZn                     |
| Surface treatment contacts | Nickel-plated            |

|                    |                       |
|--------------------|-----------------------|
| a                  | 125 mm                |
| b                  | 80 mm                 |
| c                  | 63 mm                 |
| d                  | 110 mm                |
| e                  | 25 °                  |
| K (cable Ø)        | 11,5-20 mm            |
| SW                 | 50 mm                 |
| wire flexible      | 2,5-6 mm <sup>2</sup> |
| strain relief      | 600 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 12-14 mm              |

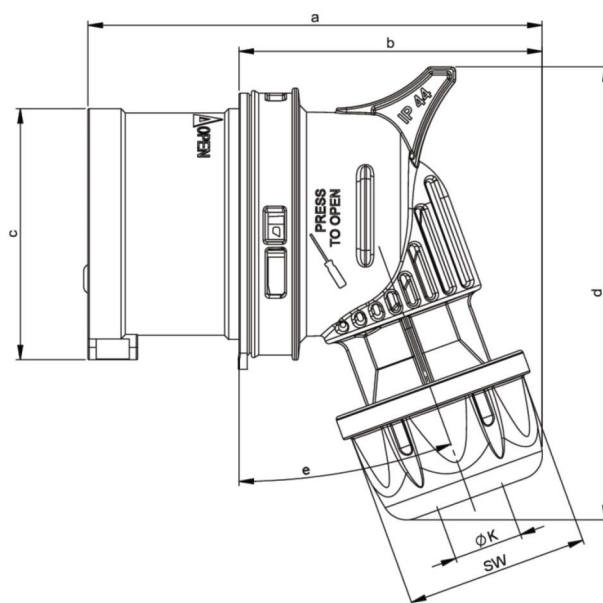

<https://www.pcelectric.at/shop/en/?func=detail&artnr=8023-9ttv>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)