


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>80252-2</b>                                                                                                                                                                                                                                                                       |
| article description    | <b>CEE angled plug 32A 5p 2h IP67 TWIST</b>                                                                                                                                                                                                                                          |
| description long       | CEE angled plug 32A 5p 2h IP67 TWIST<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 2h<br>rated voltage/frequency: >50V~ / 300-500Hz<br>contacts: brass<br>connection technology: screw terminals<br>IP protection class: IP67 |
| country of origin      | AT                                                                                                                                                                                                                                                                                   |
| customs number         | 85366990                                                                                                                                                                                                                                                                             |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                   |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                   |

|                            |                              |
|----------------------------|------------------------------|
| ETIM 8.0                   | EC000140                     |
| IEC-amperage               | 32 A                         |
| Number of poles            | 5                            |
| Voltage acc. EN 60309-2    | 50-500 V (>300-500 Hz) green |
| Clock hour position        | 5 h                          |
| Identification colour      | Green                        |
| Degree of protection (IP)  | IP67                         |
| Connection system          | Screwed terminal             |
| Cable entry                | Swivel                       |
| Angle of plug              | Angled                       |
| Material                   | Plastic                      |
| Contact material           | CuZn                         |
| Surface treatment contacts | Untreated                    |

|                    |            |
|--------------------|------------|
| a                  | 136 mm     |
| b                  | 100 mm     |
| c                  | 118 mm     |
| d                  | 25 °       |
| K (cable Ø)        | 11,5-22 mm |
| SW                 | 50 mm      |
| wire flexible      | 2,5-6 mm²  |
| contact screws     | 110 Ncm    |
| strain relief      | 600 Ncm    |
| dismantling length | 50 mm      |
| stripping length   | 12-14 mm   |

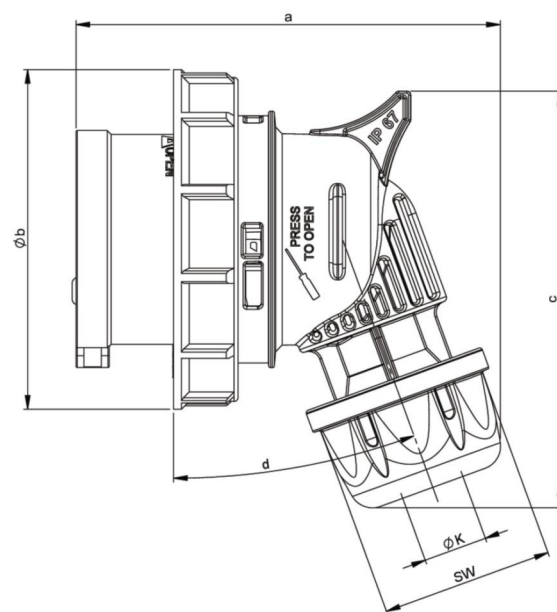

<https://www.pcelectric.at/shop/en/?func=detail&artnr=80252-2>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)