


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                     |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>80252-7v</b>                                                                                                                                                                                                                                                                                                     |
| article description    | <b>CEE angled plug 32A 5p 7h IP67 TWIST</b>                                                                                                                                                                                                                                                                         |
| description long       | CEE angled plug 32A 5p 7h IP67 TWIST<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 7h<br>rated voltage/frequency: 277/480V~ - 288/500V~<br>/ 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP67 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                  |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                            |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                  |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                  |

|                            |                        |
|----------------------------|------------------------|
| ETIM 8.0                   | EC000140               |
| IEC-amperage               | 32 A                   |
| Number of poles            | 5                      |
| Voltage acc. EN 60309-2    | 500 V (50+60 Hz) black |
| Clock hour position        | 7 h                    |
| Identification colour      | Black                  |
| Degree of protection (IP)  | IP67                   |
| Connection system          | Screwed terminal       |
| Cable entry                | Swivel                 |
| Angle of plug              | Angled                 |
| Material                   | Plastic                |
| Contact material           | CuZn                   |
| Surface treatment contacts | Nickel-plated          |

|                    |                       |
|--------------------|-----------------------|
| a                  | 136 mm                |
| b                  | 100 mm                |
| c                  | 118 mm                |
| d                  | 25 °                  |
| K (cable Ø)        | 11,5-22 mm            |
| SW                 | 50 mm                 |
| wire flexible      | 2,5-6 mm <sup>2</sup> |
| contact screws     | 110 Ncm               |
| strain relief      | 600 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 12-14 mm              |

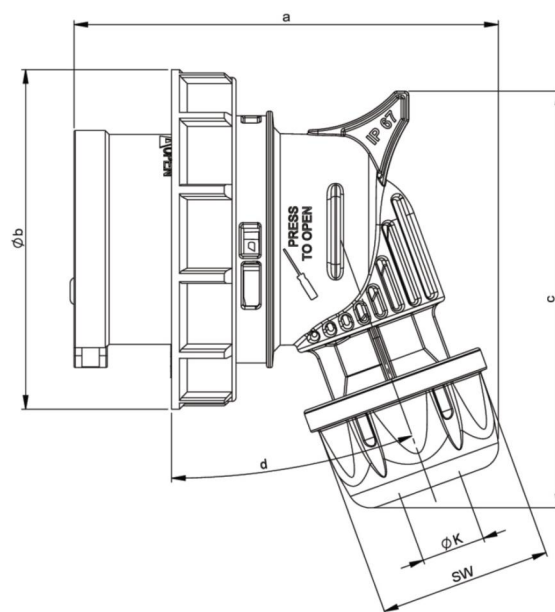

<https://www.pcelectric.at/shop/en/?func=detail&artnr=80252-7v>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)