


PCE data sheet

article#	2149-5v
article description	CEE-connector 20A 3P4W 5h IP44 UL
description long	CEE-connector 20A 3P4W 5h IP44 UL (PCE420C5Sv) housing material: PA6 rated current: 20A number of poles: 3P4W (4p) clock position: 5h rated voltage: 600Vac contacts: brass nickel plated connection technology: screw terminals IP protection class: IP44
GTIN (EAN)	9003399429996
country of origin	AT
customs number	85366990
net weight	0.161 kg
packaging quantity	10

ETIM 7.0	EC001320
IEC-amperage	
Amperage acc. UL/CSA (for UL-version)	20 A
Number of poles	4
Clock hour position	5 h
Identification colour	Black
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Angle of plug	Straight
Cable entry	Swivel
Material	Plastic
Contact material	CuZn
Surface finish contacts	Nickel-plated

a	138 mm
b	82 mm
K (cable Ø)	9-15 mm
SW	42 mm
wire flexible	1-2,5 mm ²
contact screws	100 Ncm
strain relief	500 Ncm
dismantling length	50 mm
stripping length	10-12 mm

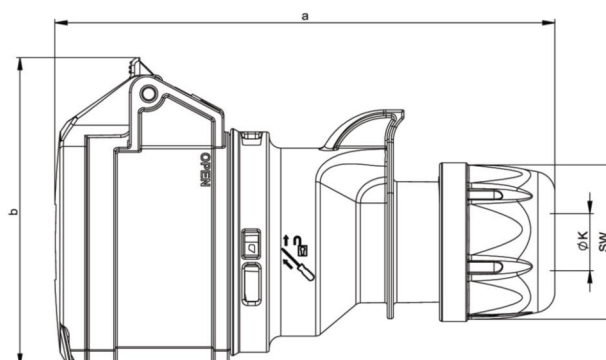

www.manufacturer-safety.info