


PCE data sheet

article#	0149-12
article description	CEE-plug 20A 3P4W 12h IP44 UL
description long	CEE-plug 20A 3P4W 12h IP44 UL (PCE420P12S) housing material: PA6 rated current: 20A number of poles: 3P4W (4p) clock position: 12h rated voltage: 120/250Vac single phase contacts: brass connection technology: screw terminals IP protection class: IP44
GTIN (EAN)	9003399186981
country of origin	AT
customs number	85366990
net weight	0.128 kg
packaging quantity	10

ETIM 7.0	EC000140
IEC-amperage	
Amperage acc. UL/CSA (for UL-version)	20 A
Number of poles	4
Clock hour position	12 h
Identification colour	
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Cable entry	Swivel
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated

a	128 mm
b	92 mm
c	53 mm
K (cable Ø)	9-15 mm
SW	42 mm
wire flexible	1-2,5 mm ²
contact screws	100 Ncm
strain relief	500 Ncm
dismantling length	50 mm
stripping length	10-12 mm

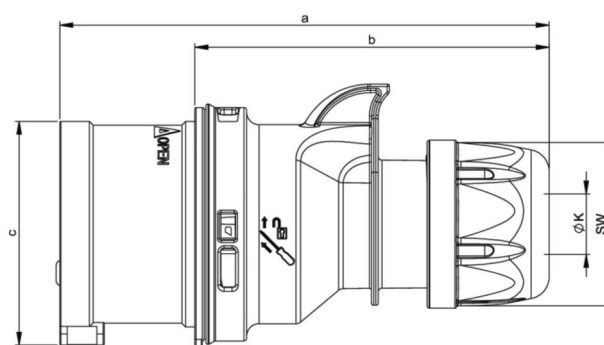

www.manufacturer-safety.info