


PCE data sheet

article#	0259-5
article description	CEE-plug 30A 4P5W 5h IP44 UL
description long	CEE-plug 30A 4P5W 5h IP44 UL (PCE530P5S) housing material: PA6 rated current: 30A number of poles: 4P5W (5p) clock position: 5h rated voltage: 347/600Vac contacts: brass connection technology: screw terminals IP protection class: IP44
GTIN (EAN)	9003399188060
country of origin	AT
customs number	85366990
net weight	0.232 kg
packaging quantity	10

ETIM 7.0	EC000140
IEC-amperage	
Amperage acc. UL/CSA (for UL-version)	30 A
Number of poles	5
Clock hour position	5 h
Identification colour	Black
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Cable entry	Swivel
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated

a	155 mm
b	109 mm
c	70 mm
K (cable Ø)	13,3-19,3 mm
SW	50 mm
wire flexible	2,5-6 mm ²
contact screws	110 Ncm
strain relief	700 Ncm
dismantling length	50 mm
stripping length	12-14 mm

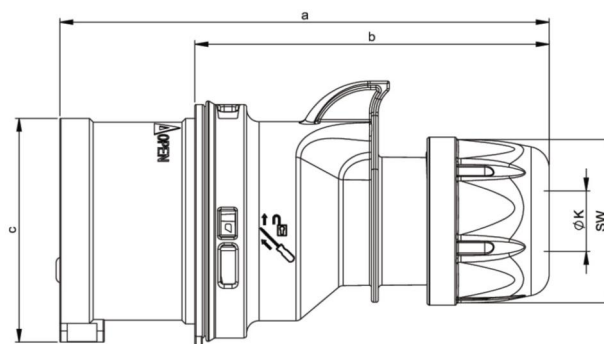

www.manufacturer-safety.info