


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>923-1wv</b>                                                                                                                                                                                                                                                                                                                                                                                                                              |
| article description    | <b>CEE-wall mounted socket wiring through 32A 3p 1h IP44</b>                                                                                                                                                                                                                                                                                                                                                                                |
| description long       | CEE-wall mounted socket wiring through 32A 3p 1h IP44<br>housing material: PA6<br>rated current: 32A<br>number of poles: 3 (2P+PE)<br>clock-position: 1h<br>rated voltage/frequency: >50V / others<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>cable entry: top, 2x bottom, rear<br>inc. threaded cable grommet<br>housing for wiring through incl. terminals (3p) not wired<br>IP protection class: IP44 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| packaging quantity     | 5                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| minimum order quantity | 5                                                                                                                                                                                                                                                                                                                                                                                                                                           |

|                           |                           |
|---------------------------|---------------------------|
| ETIM 8.0                  | EC001321                  |
| Model                     | Surface mounted (plaster) |
| IEC-amperage              | 32 A                      |
| Number of poles           | 3                         |
| Voltage acc. EN 60309-2   | Other                     |
| Clock hour position       | 1 h                       |
| Identification colour     | Grey                      |
| Degree of protection (IP) | IP44                      |
| Connection system         | Screwed terminal          |
| Cable entry               | Swivel                    |
| Material                  | Plastic                   |
| Contact material          | CuZn                      |
| Surface finish contacts   | Nickel-plated             |

|                    |                        |
|--------------------|------------------------|
| wire flexible      | 2,5-6 mm <sup>2</sup>  |
| wire solid         | 2,5-10 mm <sup>2</sup> |
| contact screws     | 110 Ncm                |
| dismantling length | 50 mm                  |
| stripping length   | 12-14 mm               |

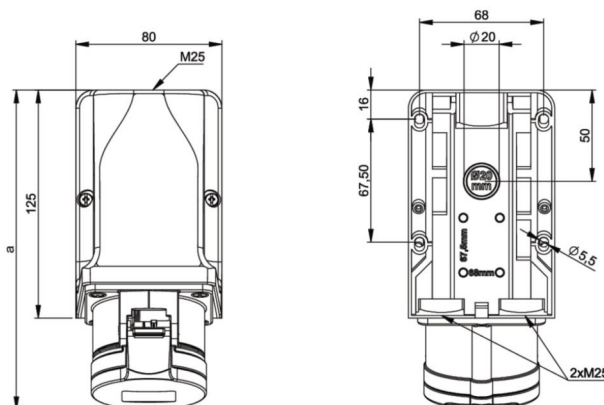

b=Höhe/height  
Neigung/angle=15°



<https://www.pcelectric.at/shop/en/?func=detail&artnr=923-1wv>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)