


PCE data sheet

article#	1456-6
article description	CEE-wall mounted socket 125A 5p 6h IP67 PCS POWER TWIST
description long	CEE-wall mounted socket 125A 5p 6h IP67 PCS POWER TWIST housing material: PC/ABS rated current: 125A number of poles: 5 (3P+N+PE) clock-position: 6h rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws cable entry: top, bottom, rear inc. threaded blind cap IP protection class: IP66/IP67 Extra: PCS (pilot contact system), silver plated contacts, wires: 2x Yf 1,5mm² L=450mm, rated current 2A
GTIN (EAN)	9003399214356
country of origin	AT
customs number	85366990
net weight	1.950 kg
packaging quantity	1
minimum order quantity	1

ETIM 7.0	EC001321
Model	Surface mounted (plaster)
IEC-ampereage	125 A
Number of poles	5
Voltage acc. EN 60309-2	400 V (50+60 Hz) red
Clock hour position	6 h
Identification colour	Red
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Cable entry	Swivel
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated
Type of fastening	External mounting
Insulated mounting	True
Military model	False

wire flexible	16-50 mm²
wire solid	16-70 mm²
contact screws	450 Ncm
dismantling length	100 mm
stripping length	24-27 mm

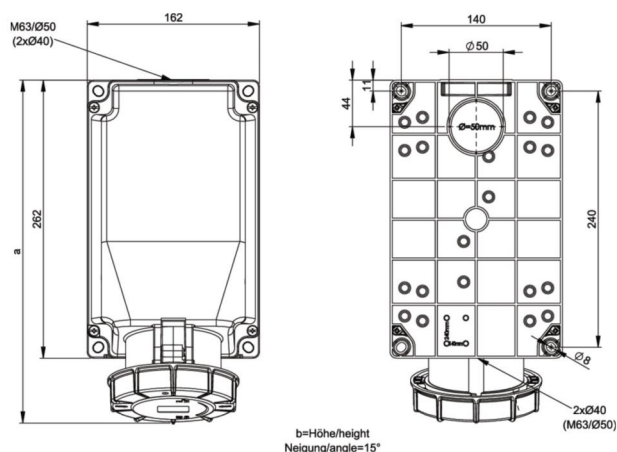

www.manufacturer-safety.info