


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>343-1</b>                                                                                                                                                                                                                                                                                                                                                                                                          |
| article description    | <b>CEE-flanged socket straight (120x120) 125A 3p 1h IP67 POWER TWIST</b>                                                                                                                                                                                                                                                                                                                                              |
| description long       | CEE-flanged socket straight (120x120) 125A 3p 1h IP67 POWER TWIST<br>housing material: PA6<br>rated current: 125A<br>number of poles: 3 (2P+PE)<br>clock-position: 1h<br>rated voltage/frequency: >50V / others<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 120x120 mm / 100x100 mm<br>IP protection class: IP66/IP67 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                    |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                              |
| packaging quantity     | 2                                                                                                                                                                                                                                                                                                                                                                                                                     |
| minimum order quantity | 2                                                                                                                                                                                                                                                                                                                                                                                                                     |

|                                |                  |
|--------------------------------|------------------|
| ETIM 8.0                       | EC001317         |
| IEC-amperage                   | 125 A            |
| Voltage acc. EN 60309-2        | Other            |
| Number of poles                | 3                |
| Clock hour position            | 1 h              |
| Identification colour          | Grey             |
| Degree of protection (IP)      | IP67             |
| Connection system              | Screwed terminal |
| Angle of plug                  | Straight         |
| Material                       | Plastic          |
| Contact material               | CuZn             |
| Surface finish contacts        | Untreated        |
| Flange size vertical           | 123 mm           |
| Drill hole distance vertical   | 100 mm           |
| Flange size horizontal         | 123 mm           |
| Drill hole distance horizontal | 100 mm           |

|                    |                       |
|--------------------|-----------------------|
| wire flexible      | 16-50 mm <sup>2</sup> |
| wire solid         | 16-70 mm <sup>2</sup> |
| contact screws     | 450 Ncm               |
| dismantling length | 100 mm                |
| stripping length   | 24-27 mm              |

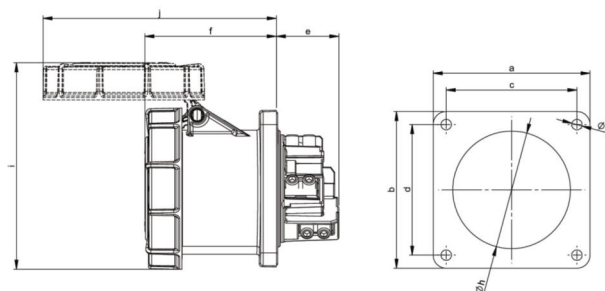

<https://www.pcelectric.at/shop/en/?func=detail&artnr=343-1>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)