
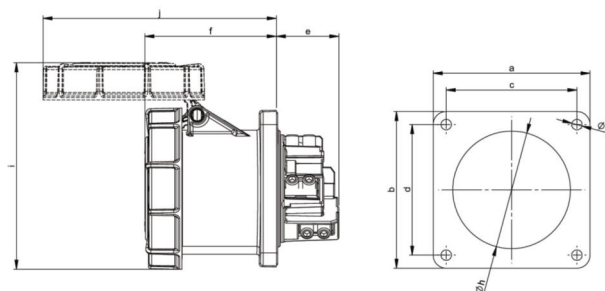


PCE data sheet

article#	344-1
article description	CEE-flanged socket straight (120x120) 125A 4p 1h IP67 POWER TWIST
description long	CEE-flanged socket straight (120x120) 125A 4p 1h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 4 (3P+PE) clock-position: 1h rated voltage/frequency: >50V / others contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws dimensions (flange/fixing center): 120x120 mm / 100x100 mm IP protection class: IP66/IP67
country of origin	AT
customs number	85366990
packaging quantity	2
minimum order quantity	2

ETIM 8.0	EC001317
IEC-amperage	125 A
Voltage acc. EN 60309-2	Other
Number of poles	4
Clock hour position	1 h
Identification colour	Grey
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated
Flange size vertical	12 β mm
Drill hole distance vertical	100 mm
Flange size horizontal	12 β mm
Drill hole distance horizontal	100 mm

wire flexible	16-50 mm ²
wire solid	16-70 mm ²
contact screws	450 Ncm
dismantling length	100 mm
stripping length	24-27 mm

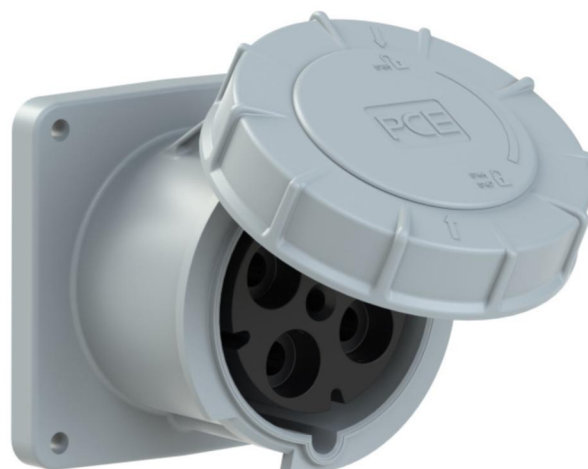

<https://www.pcelectric.at/shop/en/?func=detail&artnr=344-1>



www.manufacturer-safety.info