


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>413-1f66</b>                                                                                                                                                                                                                                                                                                                                                                                 |
| article description    | <b>CEE-flanged socket sloping (62x68mm) 16A 3p 1h IP44/IP54 locking</b>                                                                                                                                                                                                                                                                                                                         |
| description long       | CEE-flanged socket sloping (62x68mm) 16A 3p 1h IP44/IP54 locking<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (2P+PE)<br>clock-position: 1h<br>rated voltage/frequency: >50V / others<br>contacts: brass<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 62x68 mm / 47x47 mm<br>lockable with padlock<br>IP protection class: IP44/IP54 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                              |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                        |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                                              |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                                              |

|                                |                |
|--------------------------------|----------------|
| ETIM 8.0                       | EC001317       |
| IEC-ampereage                  | 16 A           |
| Voltage acc. EN 60309-2        | Other          |
| Number of poles                | 3              |
| Clock hour position            | 1 h            |
| Identification colour          | Grey           |
| Degree of protection (IP)      | IP44           |
| Connection system              | Screw terminal |
| Angle of plug                  | Angled         |
| Material                       | Plastic        |
| Contact material               | CuZn           |
| Surface finish contacts        | Untreated      |
| Flange size vertical           | 68 mm          |
| Drill hole distance vertical   | 47 mm          |
| Flange size horizontal         | 62 mm          |
| Drill hole distance horizontal | 47 mm          |

|                    |                       |
|--------------------|-----------------------|
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| wire solid         | 1-4 mm <sup>2</sup>   |
| contact screws     | 100 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 10-12 mm              |

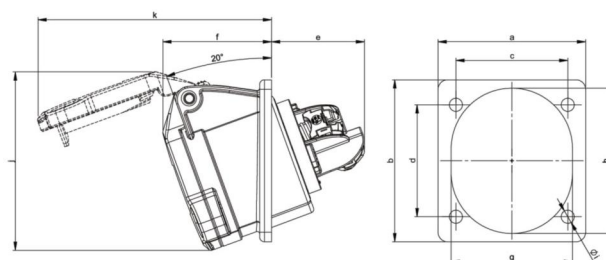

<https://www.pcelectric.at/shop/en/?func=detail&artnr=413-1f66>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)