


PCE data sheet

article#	443-1
article description	CEE-flanged socket sloping (120x130) 125A 3p 1h IP67 POWER TWIST
description long	CEE-flanged socket sloping (120x130) 125A 3p 1h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 3 (2P+PE) clock-position: 1h rated voltage/frequency: >50V / others contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws dimensions (flange/fixing center): 120x130 mm / 100x108 mm IP protection class: IP66/IP67
country of origin	AT
customs number	85366990
packaging quantity	2
minimum order quantity	2

ETIM 8.0	EC001317
IEC-ampereage	125 A
Voltage acc. EN 60309-2	Other
Number of poles	3
Clock hour position	1 h
Identification colour	Grey
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated
Flange size vertical	130 mm
Drill hole distance vertical	108 mm
Flange size horizontal	123 mm
Drill hole distance horizontal	100 mm

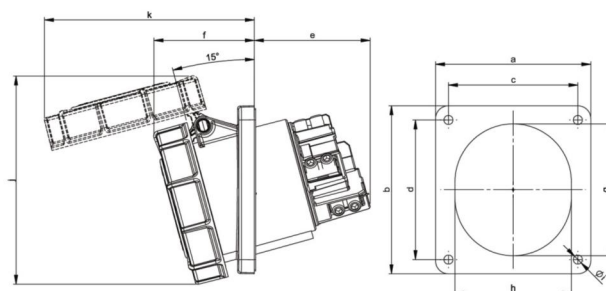

<https://www.pcelectric.at/shop/en/?func=detail&artnr=443-1>



www.manufacturer-safety.info