


PCE data sheet

article#	443-1fe
article description	CEE-flanged socket sloping (114x114) 125A 3p 1h IP67 POWER TWIST
description long	CEE-flanged socket sloping (114x114) 125A 3p 1h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 3 (2P+PE) clock-position: 1h rated voltage/frequency: >50V / others contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws dimensions (flange/fixing center): 114x114 mm / 90x90 mm IP protection class: IP66/IP67
country of origin	AT
customs number	85366990
packaging quantity	2
minimum order quantity	2

ETIM 8.0	EC001317
IEC-ampereage	125 A
Voltage acc. EN 60309-2	Other
Number of poles	3
Clock hour position	1 h
Identification colour	Grey
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated
Flange size vertical	114 mm
Drill hole distance vertical	90 mm
Flange size horizontal	114 mm
Drill hole distance horizontal	90 mm

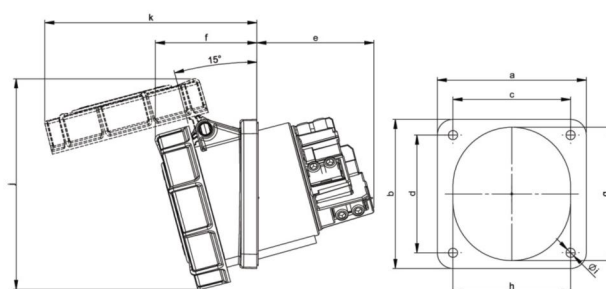

<https://www.pcelectric.at/shop/en/?func=detail&artnr=443-1fe>



www.manufacturer-safety.info