


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>334-1fc</b>                                                                                                                                                                                                                                                                                                                                                                                                    |
| article description    | <b>CEE-flanged socket straight (100x107) 63A 4p 1h IP67 POWER TWIST</b>                                                                                                                                                                                                                                                                                                                                           |
| description long       | CEE-flanged socket straight (100x107) 63A 4p 1h IP67 POWER TWIST<br>housing material: PA6<br>rated current: 63A<br>number of poles: 4 (3P+PE)<br>clock-position: 1h<br>rated voltage/frequency: >50V / others<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 100x107 mm / 77x85 mm<br>IP protection class: IP66/IP67 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                          |
| packaging quantity     | 2                                                                                                                                                                                                                                                                                                                                                                                                                 |
| minimum order quantity | 2                                                                                                                                                                                                                                                                                                                                                                                                                 |

|                                |                  |
|--------------------------------|------------------|
| ETIM 8.0                       | EC001317         |
| IEC-ampereage                  | 63 A             |
| Voltage acc. EN 60309-2        | Other            |
| Number of poles                | 4                |
| Clock hour position            | 1 h              |
| Identification colour          | Grey             |
| Degree of protection (IP)      | IP67             |
| Connection system              | Screwed terminal |
| Angle of plug                  | Straight         |
| Material                       | Plastic          |
| Contact material               | CuZn             |
| Surface finish contacts        | Untreated        |
| Flange size vertical           | 107 mm           |
| Drill hole distance vertical   | 85 mm            |
| Flange size horizontal         | 100 mm           |
| Drill hole distance horizontal | 77 mm            |

|                    |                      |
|--------------------|----------------------|
| wire flexible      | 6-16 mm <sup>2</sup> |
| wire solid         | 6-25 mm <sup>2</sup> |
| contact screws     | 200 Ncm              |
| dismantling length | 100 mm               |
| stripping length   | 15-18 mm             |

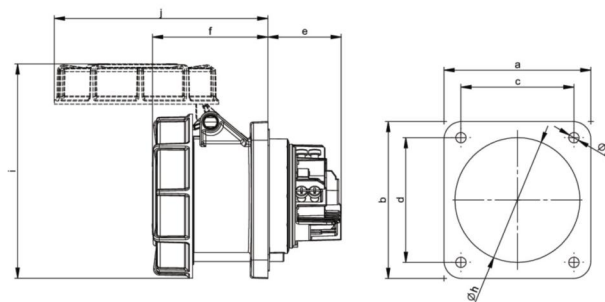

<https://www.pcelectric.at/shop/en/?func=detail&artnr=334-1fc>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)