

N110x180S

Cat. number:
35270202
color: grey



SURFACE JUNCTION BOXES

TECHNICAL DATA

WEIGHT	213,3 g
EXTERNAL DIMENSIONS A/B/C (mm)	118 / 68 / 188
MATERIAL	Polyamide PA 6
PROTECTION RATING	IP67
RESISTANCE TO UV RADIATION	Yes
RESISTANCE TO HEAT	960 °C
SELF-EXTINGUISHING	Yes
HALOGEN-FREE	Yes
FIRE RESISTANCE CLASS	UL94 V0
COLLECTIVE PACKAGING	9 pcs
ACCESSORIES	Screwed cable glands PG16 and PG21
STANDARD	PN-EN IEC 60670-1
ADDITIONAL FEATURES	This product includes 12 knockouts for threaded cable glands, PG16 (Ø 23 mm) and PG21 (Ø 29 mm), 4 acid-resistant threaded screws

N180x180S

Cat. number:
35300202
color: grey



WEIGHT	413 g
EXTERNAL DIMENSIONS A/B/C (mm)	188 / 88 / 188
MATERIAL	Polyamide PA 6
PROTECTION RATING	IP67
RESISTANCE TO UV RADIATION	Yes
RESISTANCE TO HEAT	960 °C
SELF-EXTINGUISHING	Yes
HALOGEN-FREE	Yes
FIRE RESISTANCE CLASS	UL94 V0
COLLECTIVE PACKAGING	4 pcs
ACCESSORIES	Screwed cable glands PG16 and PG21
STANDARD	PN-EN IEC 60670-1
ADDITIONAL FEATURES	This product includes 12 knockouts for threaded cable glands, PG16 (Ø 23 mm) and PG21 (Ø 29 mm), 4 acid-resistant threaded screws,

Junction boxes available in white color



SURFACE JUNCTION BOXES AIRTIGHT ENCLOSURES



SOH 110x180

HERMETIC ENCLOSURES

SURFACE JUNCTION BOXES

NPP100

TECHNICAL DATA

TECHNICAL DATA

Cat. number:
36432206
color: white



WEIGHT	292 g
EXTERNAL DIMENSIONS A/B/C (mm)	118 / 108 / 188
MATERIAL	Polyamide PA 6 + polycarbonate
PROTECTION RATING	IP67
RESISTANCE TO UV RADIATION	Yes
RESISTANCE TO HEAT	850 °C
SELF-EXTINGUISHING	Yes
HALOGEN-FREE	Yes
FIRE RESISTANCE CLASS	UL94 V2
COLLECTIVE PACKAGING	6 pcs
STANDARD	PN-EN IEC 60670-1
ADDITIONAL FEATURES	This product includes 12 knockouts for threaded cable glands, PG16 (Ø 23 mm) and PG21 (Ø 29 mm), 4 acid-resistant threaded screws

WEIGHT	64,3 g
EXTERNAL DIMENSIONS A/B/C (mm)	100 / 52 / 100
MATERIAL	Polypropylene + polyethylene
PROTECTION RATING	IP54
RESISTANCE TO UV RADIATION	Yes
RESISTANCE TO HEAT	650 °C
SELF-EXTINGUISHING	Yes
HALOGEN-FREE	Yes
COLLECTIVE PACKAGING	20 pcs
STANDARD	PN-EN IEC 60670-1
ACCESORIES	Screwed cable glands DM2g (grey) or DM2w (white)
ADDITIONAL FEATURES	This product includes 6 knockouts for threaded cable glands, 4 screwed cable glands

Cat. number:
35380006
color: white



Cat. number:
36432202
color: grey




Cat. number:
35380002
color: grey



SOH 180x180

NPP130

Cat. number:
36434206
color: white

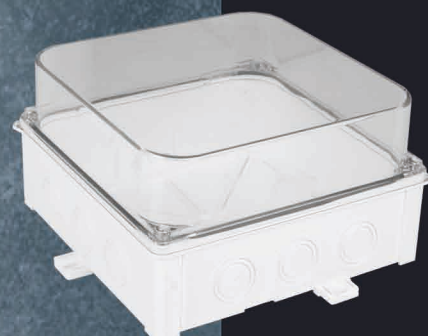

WEIGHT	458 g
EXTERNAL DIMENSIONS A/B/C (mm)	188 / 108 / 188
MATERIAL	Polyamide PA 6 + polycarbonate
PROTECTION RATING	IP67
RESISTANCE TO UV RADIATION	Yes
RESISTANCE TO HEAT	850 °C
SELF-EXTINGUISHING	Yes
HALOGEN-FREE	Yes
FIRE RESISTANCE CLASS	UL94 V2
COLLECTIVE PACKAGING	3 pcs
STANDARD	PN-EN IEC 60670-1
ADDITIONAL FEATURES	This product includes 12 knockouts for threaded cable glands, PG16 (Ø 23 mm) and PG21 (Ø 29 mm), 4 acid-resistant threaded screws

WEIGHT	101,5 g
EXTERNAL DIMENSIONS (mm)	130 / 52 / 130
MATERIAL	Polypropylene + polyethylene
PROTECTION RATING	IP54
RESISTANCE TO UV RADIATION	Yes
RESISTANCE TO HEAT	650 °C
SELF-EXTINGUISHING	Yes
HALOGEN-FREE	Yes
COLLECTIVE PACKAGING	15 pcs
STANDARD	PN-EN IEC 60670-1
ACCESORIES	Screwed cable glands DM2g (grey) or DM2w (white)
ADDITIONAL FEATURES	This product includes 8 knockouts for threaded cable glands, 8 screwed cable glands

Cat. number:
35390006
color: white



Cat. number:
36434202
color: grey



Cat. number:
35390002
color: grey

