



CoreLine Projector gen2

ST151T LED30S/940 WB BK

- 38 degree(s) - 940 neutral white - Power supply unit

The well-known CoreLine Projector with its latest generation has undergone important design and performance improvement, raising the bar even higher and setting a new standard for track projectors used in retail and hospitality applications.

Warnings and Safety

- The luminaire should be mounted outside of arm's reach
- The luminaire should be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements

Product data

Operating and electrical			
Input Voltage	220 to 240 V	Light source replaceable	No
Line Frequency	50 or 60 Hz	Number of gear units	Unit
Input frequency	50 or 60 Hz	Driver/power unit/transformer	Power supply unit
Initial CLO power consumption	27 W	Driver included	Yes
Average CLO power consumption	27 W	Optic type	Beam angle 38°
Power Consumption	27 W	Luminaire light beam spread	38°
Inrush current	43.8 A	Control interface	-
Inrush time	0.0115 ms	Connection	Track
Power Factor (Fraction)	0.9	Cable	-
General information		Protection class IEC	Safety class I
Beam angle of light source	38 degree(s)	Glow-wire test	Temperature 650 °C, duration 30 s
Light source colour	940 neutral white	Flammability mark	-
		CE mark	Yes
		ENEC mark	ENEC mark


CoreLine Projector gen2

Warranty period	5 years
Constant light output	Yes
Number of products on MCB of 16 A type B	30
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
Photobiological risk specification	0.2 m
EU RoHS compliant	Yes
Unified Glare Rating (CEN)	20
Lighting Technology	LED
Brand	Philips
Value ladder	Value
Light technical	
Luminous Flux	3,000 lm
Saturated Red (R9)	>50
Luminous Efficacy (rated) (Nom)	110 lm/W
Colour rendering index (CRI)	>90
Temperature	
Ambient temperature range	-20 to +40 °C
Mechanical and housing	
Housing material	Aluminium
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	-
Housing Colour	Black
Optical cover/lens finish	-
Overall length	207 mm
Overall width	87 mm
Overall height	125 mm
Overall diameter	80 mm
Dimensions (height x width x depth)	Nan x Nan x Nan mm

Approval and application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK03 [0.3 J]
Sustainability rating	-
Initial performance (IEC compliant)	
Luminous flux tolerance	+/-10%
Init. Corr. Colour Temperature	4000 K
Initial chromaticity	(0.3837, 0.3828) SDCM <4
Power consumption tolerance	+/-10%
Over time performance (IEC compliant)	
Control gear failure rate at median useful life	0.05 %
50,000 h	
Lumen maintenance at median useful life*	L70
50,000 h	
Application conditions	
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	No
Product data	
Full EOC	871951452860499
Order product name	ST151T LED30S/940 WB BK
Order code	52860499
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
Material number (12NC)	911401847082
Net weight	0.510 kg
Full product name	ST151T LED30S/940 WB BK
EAN/UPC - Case	8719514528680



Dimensional drawing

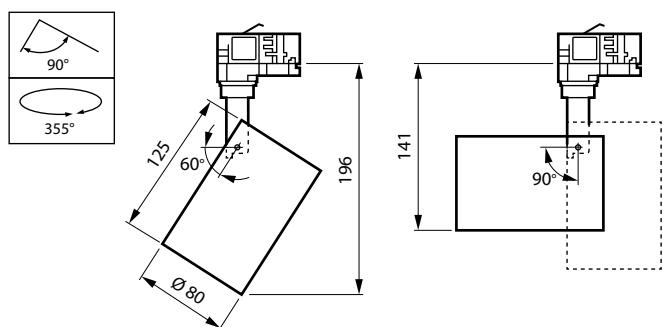

CoreLine Projector gen2



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com
2023, April 15 - data subject to change