



MASTER PL-C 4 Pin



MASTER PL-C 18W/830/4P 1CT/5X10BOX.

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information			
Cap base	G24Q-2 [G24q-2]		
Life to 50% failures preheat (nom.)	13000 h		
LSF preheat 2,000 hours rated	99 %		
LSF preheat 4,000 hours rated	98 %		
LSF preheat 6,000 hours rated	97 %		
LSF preheat 8,000 hours rated	90 %		
	Sphere		
Light technical			
Colour Code	830 [CCT of 3,000 K]		
Luminous flux (nom.)	1200 lm		
Luminous flux (rated) (nom.)	1200 lm		
Colour designation	Warm white (WW)		
Chromaticity coordinate X (nom.)	0.44		
Chromaticity coordinate Y (nom.)	0.403		
Correlated Colour Temperature (Nom)	3000 K		

Luminous efficacy (rated) (nom.)	67 lm/W
Colour rendering index (nom.)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	83 %
LLMF 8000 h Rated	81 %
LLMF 12000 h Rated	81 %
Operating and electrical	
Power (Rated) (Nom)	18.4 W
Lamp current (nom.)	0.230 A
Temperature	
Design temperature (nom.)	28 ℃


Datasheet, 2022, November 29 data subject to change

MASTER PL-C 4 Pin

Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Cap-base information	4P
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	1.4 mg
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	19 kWh
	423302
	-

Product data			
Full product code	871150062333170		
Order product name	MASTER PL-C 18W/830/4P 1CT/5X10BOX		
EAN/UPC – product	8711500623331		
Order code	62333170		
Local order code	18PLC8304PIN		
SAP numerator – quantity per pack	1		
Numerator – packs per outer box	50		
SAP material	927907283040		
Net Weight (Piece)	55.300 g		
ILCOS code	FSQ-18/30/1B-E-G24q=2		


Dimensional drawing




MASTER PL-C 18W/830/4P 1CT/5X10BOX

Product D (max) D1 (max) A (max) B (max) C (max) MASTER PL-C 18W/830/4P 27.1 mm 27.1 mm 109.5 mm 128.0 mm 142.9 mm 1CT/5X10BOX

Photometric data

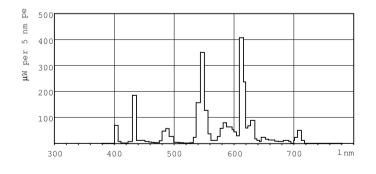


Lightcolour /830

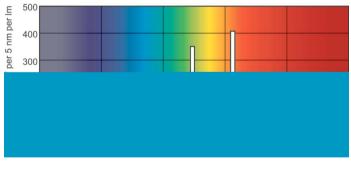


Lightcolour /830

MASTER PL-C 4 Pin

Lifetime

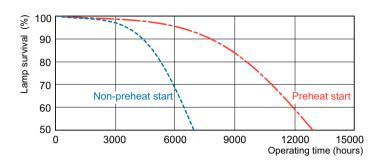



LDLE_PLC4P_0001-Life expectancy diagram

LDLE_PLC4P_0002-Life expectancy diagram

_	100			
0	100			
0				
~			I	

LDLM_PLC4P_0001-Lumen maintenance diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.