



MASTER TL-D Super 80



MASTER TL-D Super 80 30W/840 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information		Operating and electrical	
Cap base	G13 [Medium Bi-Pin Fluorescent]	Chromaticity coordinate X (nom.)	0.38
Life to 10% failures (nom.)	12000 h	Chromaticity coordinate Y (nom.)	0.38
Life to 50% failures (nom.)	15000 h	Correlated Colour Temperature (Nom)	4000 K
Life to 50% failures preheat (nom.)	20000 h	Luminous efficacy (rated) (nom.)	80 lm/W
LSF 2000 h Rated	99 %	Colour rendering index (nom.)	81
LSF 4000 h Rated	99 %	LLMF 2000 h Rated	96 %
LSF 6000 h Rated	99 %	LLMF 4000 h Rated	95 %
LSF 8000 h Rated	99 %	LLMF 6000 h Rated	94 %
LSF 12000 h Rated	89 %	LLMF 8000 h Rated	93 %
LSF 16000 h Rated	33 %	LLMF 12000 h Rated	92 %
LSF 20000 h Rated	2 %	LLMF 16000 h Rated	91 %
	Sphere	LLMF 20000 h Rated	90 %
Light technical			
Colour Code	840 [CCT of 4,000 K]	Power (Rated) (Nom)	30.2 W
Luminous flux (nom.)	2400 lm	Lamp current (nom.)	0.360 A
Luminous flux (rated) (nom.)	2400 lm		
Colour designation	Cool White (CW)		

MASTER TL-D Super 80

Temperature

Design temperature (nom.)	25 °C
---------------------------	-------

Controls and dimming

Dimmable	Yes
----------	-----

Mechanical and housing

Bulb shape	T8 [26 mm (T8)]
------------	------------------


Approval and application

Energy Efficiency Class	G
Mercury (Hg) content (nom.)	1.7 mg
Energy consumption kWh/1,000 hours	31 kWh
	423374

Product data

Full product code	871150063186240
Order product name	MASTER TL-D Super 80 30W/840 1SL/25
EAN/UPC – product	8711500631862
Order code	63186240
Local order code	30840
SAP numerator – quantity per pack	1
Local code description	4922240
Numerator – packs per outer box	25
SAP material	927920584023
Net Weight (Piece)	103.600 g
ILCOS code	FD-30/40/1B-E-G13



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 30W/840 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

MASTER TL-D Super 80 30W/840 1SL/25

Photometric data

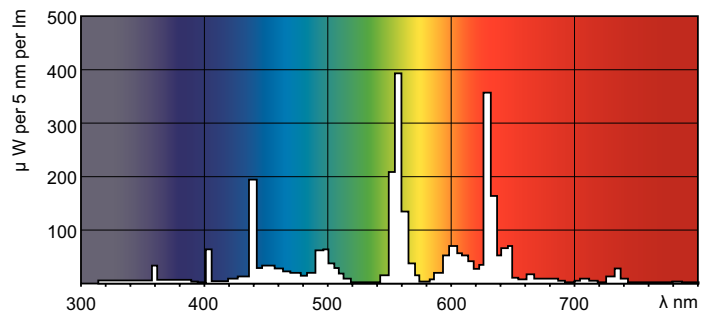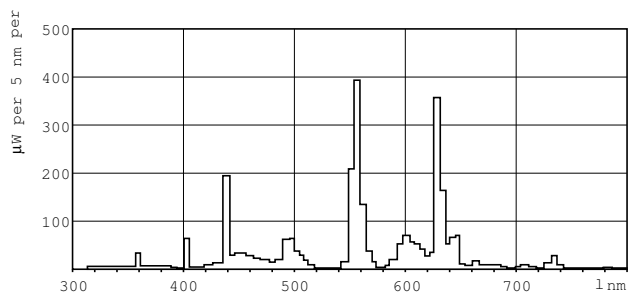

Lightcolour /840

Lightcolour /840

MASTER TL-D Super 80

Lifetime



LDLE_TL-D8_0001-Life expectancy diagram

LDLE_TL-D8_0002-Life expectancy diagram



LDLM_TL-D8_0001-Lumen maintenance diagram

