



MASTER TL5 High Efficiency



MASTER TL5 HE 21W/840 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap base	G5 [G5]
Life to 50% failures preheat (nom.)	24000 h
Features	na [Not Applicable]
System description	High Efficiency
LSF preheat 2,000 hours rated	99 %
LSF preheat 4,000 hours rated	99 %
LSF preheat 6,000 hours rated	99 %
LSF preheat 8,000 hours rated	99 %
LSF preheat 16,000 hours rated	97 %
LSF preheat 20,000 hours rated	84 %
	Sphere
Light technical	
Colour Code	840 [CCT of 4,000 K]
Luminous flux (nom.)	1900 lm
Luminous flux (rated) (nom.)	1850 lm
Colour designation	Cool White (CW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	101 lm/W

Chromaticity coordinate X (nom.)	0.38
Chromaticity coordinate Y (nom.)	0.38
Correlated Colour Temperature (Nom)	4000 K
Luminous efficacy (rated) (nom.)	90 lm/W
Color rendering index (max.)	85
Colour-rendering index (min.)	80
Colour rendering index (nom.)	80
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %
Operating and electrical	
Power (Rated) (Nom)	20.8 W
Lamp current (nom.)	0.165 A

MASTER TL5 High Efficiency

Temperature

Design temperature (nom.)	35 °C
---------------------------	-------

Controls and dimming

Dimmable	Yes
----------	-----

Mechanical and housing

Cap-base information	Green Plate
Bulb shape	T5 [16 mm (T5)]

Approval and application

Energy Efficiency Class	G
Mercury (Hg) content (nom.)	1.2 mg
Energy consumption kWh/1,000 hours	21 kWh
	423455

Product data

Full product code	871150063944855
Order product name	MASTER TL5 HE 21W/840 SLV/40
EAN/UPC – product	8711500639448
Order code	63944855
Local order code	21840
SAP numerator – quantity per pack	1
Local code description	4922584
Numerator – packs per outer box	40
SAP material	927926284055
Net Weight (Piece)	79.200 g
ILCOS code	FDH-21/40/1B-L/P-G5-16/850



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 21W/840 SLV/40	17 mm	849.0 mm	856.1 mm	853.7 mm	863.2 mm

MASTER TL5 HE 21W/840 SLV/40

Photometric data

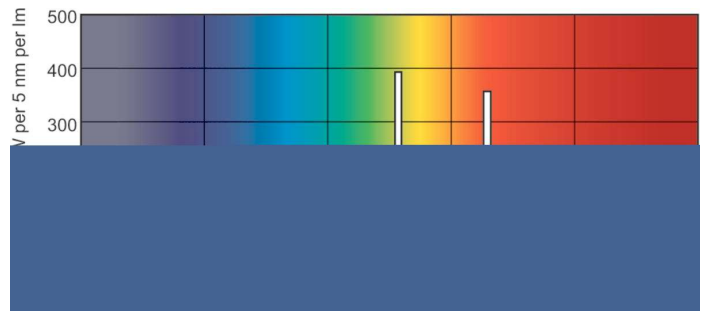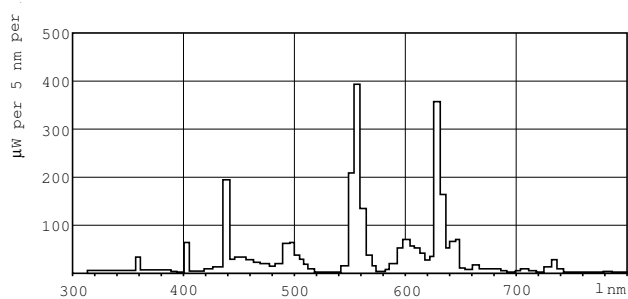

Lightcolour /840

Lightcolour /840

MASTER TL5 High Efficiency

Lifetime



LDLE_TL5-HE8_0001-Life expectancy diagram

LDLE_TL5-HE8_0002-Life expectancy diagram



LDLM_TL5-HE8_0001-Lumen maintenance diagram

