



MASTER TL5 High Output



MASTER TL5 HO 49W/840 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap base	G5 [G5]
Life to 50% failures preheat (nom.)	30000 h
Features	na [Not Applicable]
System description	High Output (HO)
LSF preheat 2,000 hours rated	99 %
LSF preheat 4,000 hours rated	99 %
LSF preheat 6,000 hours rated	99 %
LSF preheat 8,000 hours rated	99 %
LSF preheat 16,000 hours rated	97 %
LSF preheat 20,000 hours rated	84 %
	Sphere
Light technical	
Colour Code	840 [CCT of 4,000 K]
Luminous flux (nom.)	4375 lm
Luminous flux (rated) (nom.)	4375 lm
Colour designation	Cool White (CW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	99 lm/W

Chromaticity coordinate X (nom.)	0.38
Chromaticity coordinate Y (nom.)	0.38
Correlated Colour Temperature (Nom)	4000 K
Luminous efficacy (rated) (nom.)	89 lm/W
Color rendering index (max.)	85
Colour-rendering index (min.)	80
Colour rendering index (nom.)	80
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	90 %
LLMF 20000 h Rated	90 %

Operating and electrical	
Power (Rated) (Nom)	49.3 W
Lamp current (nom.)	0.255 A

MASTER TL5 High Output

Temperature

Design temperature (nom.)	35 °C
---------------------------	-------

Controls and dimming

Dimmable	Yes
----------	-----

Mechanical and housing

Cap-base information	Green Plate
Bulb shape	T5 [16 mm (T5)]


Approval and application

Energy Efficiency Class	G
Mercury (Hg) content (nom.)	1.2 mg
Energy consumption kWh/1,000 hours	50 kWh
	423548

Product data

Full product code	871150063956155
Order product name	MASTER TL5 HO 49W/840 SLV/40
EAN/UPC – product	8711500639561
Order code	63956155
Local order code	49840
SAP numerator – quantity per pack	1
Local code description	4927584
Numerator – packs per outer box	40
SAP material	927927584055
Net Weight (Piece)	128.700 g
ILCOS code	FDH-49/40/1B-L/P-G5-16/1450



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 49W/840 SLV/40	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm

MASTER TL5 HO 49W/840 SLV/40

Photometric data

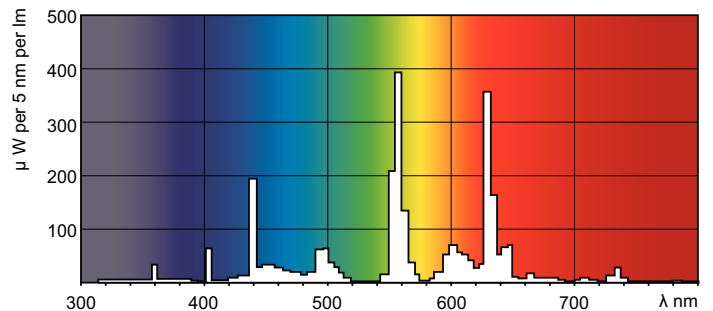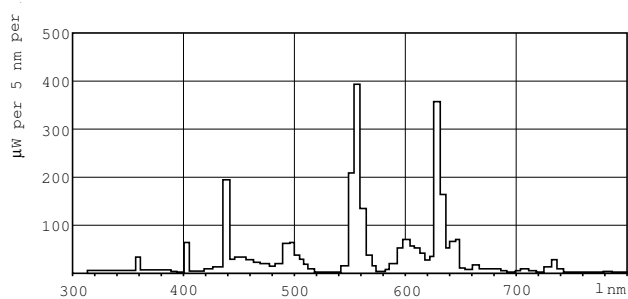


Lightcolour /840

Lightcolour /840

MASTER TL5 High Output

Lifetime

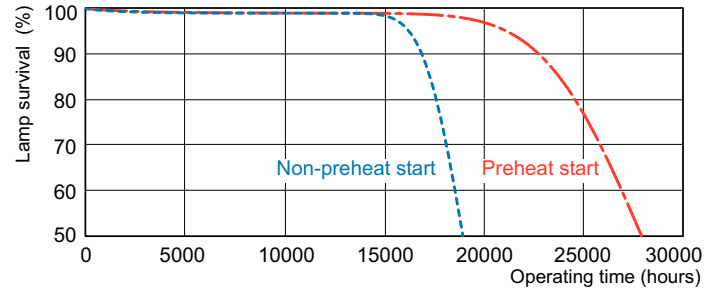

LDLE_TL5-HO8_0001-Life expectancy diagram

LDLE_TL5-HO8_0002-Life expectancy diagram



LDLM_TL5-HO8_0001-Lumen maintenance diagram

