



MASTERColour CDM-TC

MASTERColour CDM-TC 35W/830 G8.5 1CT/12

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General information	
Cap base	G8.5 [G8.5]
Operating position	UNIVERSAL [Any/Universal]
Life to 5% failures (nom.)	9000 h
Life to 10% failures (nom.)	10000 h
Life to 20% failures (nom.)	11000 h
Life to 50% failures (nom.)	12000 h
ANSI code HID	C130/E
	Sphere
Light technical	
Colour Code	830 [CCT of 3,000 K]
Luminous flux (nom.)	3100 lm
Luminous flux (rated) (nom.)	3100 lm
Colour designation	
Warm white (WW)	
Lumen maintenance 10,000 hours (nom.)	50 %
Lumen maintenance 2,000 hours (min.)	70 %
Lumen maintenance 2,000 hours (nom.)	80 %
Lumen maintenance 5,000 hours (min.)	50 %
Lumen maintenance 5,000 hours (nom.)	65 %
Chromaticity coordinate X (nom.)	0.434
Chromaticity coordinate Y (nom.)	0.398
Correlated Colour Temperature (Nom)	3000 K
Luminous efficacy (rated) (nom.)	79 lm/W
Colour rendering index (nom.)	81
Operating and electrical	
Power (Rated) (Nom)	39.1 W

MASTERColour CDM-TC

Lamp current run-up (max.)	0.8 A
Lamp current (EM) (nom.)	0.53 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	198 V
Ignition peak voltage (min.)	3500 V
Re-ignition time (min.) (max.)	15 min
Ignition time (max.)	30 s
Voltage (Max)	96 V
Voltage (Min)	80 V
Voltage (Nom)	88 V
Controls and dimming	
Dimmable	No
Run-up time 90% (max.)	3 min
Mechanical and housing	
Lamp Finish	Clear
Bulb material	UV-Block Quartz
Bulb shape	T14 [T 14 mm]
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	3.1 mg
Mercury (Hg) content (nom.)	3.1 mg
Energy consumption kWh/1,000 hours	40 kWh

Dimensional drawing

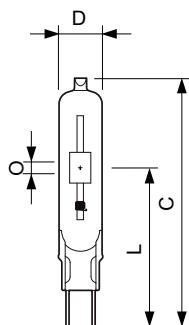


MASTERColour CDM-TC 35W/830 G8.5 1CT/12

	473341
UV	
PET (NIOSH) (min.)	8 h/500lx
Damage factor D/fc (max.)	0.3
Luminaire design requirements	
Bulb temperature (max.)	500 °C
Pinch temperature (max.)	300 °C
Pinch Temperature (Max)-DUP(do not use)	300 °C
Product data	
Full product code	871150020000615
Order product name	MASTERColour CDM-TC 35W/830 G8.5
	1CT/12
EAN/UPC – product	8711500200006
Order code	20000615
Local order code	35CDMTC830
SAP numerator – quantity per pack	1
Local code description	8348260
Numerator – packs per outer box	12
SAP material	928085205125
Net Weight (Piece)	10.000 g
ILCOS code	MT/UB-35/830-H-G8.5-17/85



Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-TC	15 mm	0.5 in	5 mm	51 mm	53 mm	52 mm	85 mm
35W/830 G8.5 1CT/12							

MASTERColour CDM-TC

Photometric data

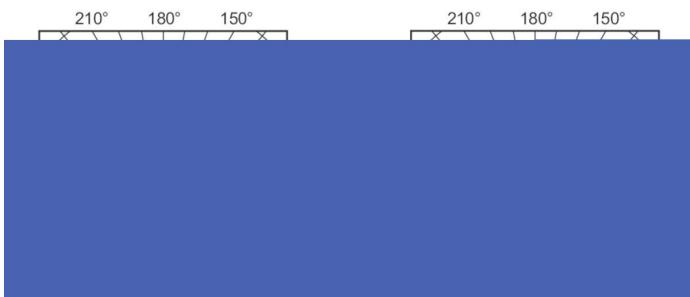

Lifetime

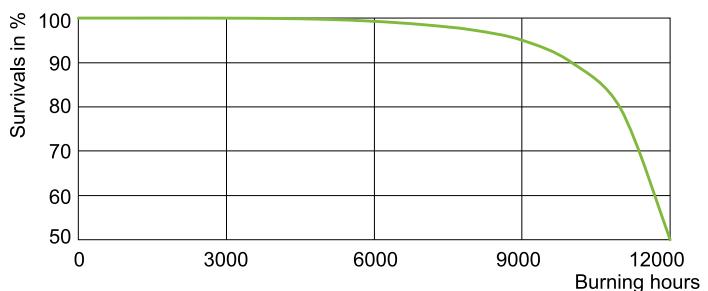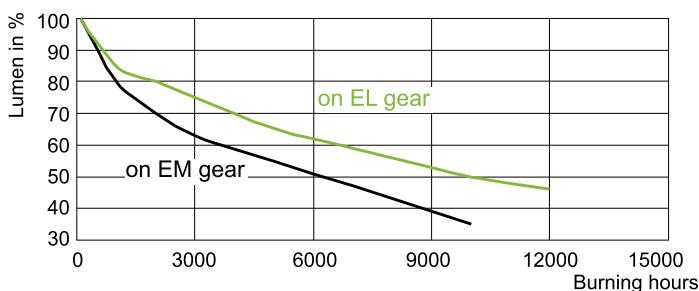

LDLM_CDM-TC_35W_830-Lumen maintenance diagram

LDLE_CDM-TC_0001-Life expectancy diagram

