



HPI-T

HPI-T 1000W/543 E40 1SL/4

Quartz metal halide lamps with clear outer bulb

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information	
Cap base	E40 [E40]
Operating position	P [Parallel or Horizontal(HOR)]
Brand	Philips
Light technical	
Colour Code	543 [CCT of 4300K]
Colour designation	Cool White (CW)
Chromaticity coordinate X (nom.)	370
Chromaticity coordinate Y (nom.)	380
Correlated Colour Temperature	4300 K
Luminous Efficacy (rated) (Nom)	83 lm/W
Colour rendering index (CRI)	57
Operating and electrical	
Power Consumption	990 W
Voltage (nom.)	130 V

Voltage (nom.)	130 V
Mechanical and housing	
Lamp Finish	Clear
Bulb shape	T65 [T 65 mm]
Approval and application	
Mercury (Hg) content (nom.)	86 mg
Energy consumption kWh/1,000 hours	1089 kWh
Product data	
Full EOC	871150018373645
Order product name	HPI-T 1000W/543 E40 1SL/4
Order code	18373645
Local order code	1000HPIT
SAP numerator – quantity per pack	1
Numerator – packs per outer box	4
Material number (12NC)	928482600096

HPI-T


Net weight	0.426 kg
Full product name	HPI-T 1000W/543 E40 1SL/4
EAN/UPC - Case	8711500183743

Dimensional drawing




Product	D (max)	O	L	C (max)
HPI-T 1000W/543 E40 1SL/4	66 mm	80 mm	240 mm	382 mm

Photometric data




Spectral Power Distribution Colour - HPI-T 1000W/543 E40 1SL/4

Lifetime

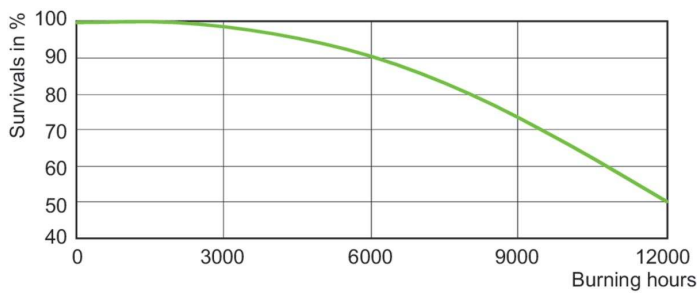

Life Expectancy Diagram - HPI-T 1000W/543 E40 1SL/4

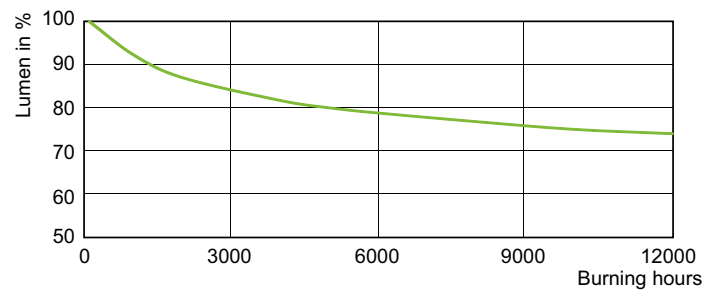

Lumen Maintenance Diagram - HPI-T 1000W/543 E40 1SL/4

