



CorePro LED PLC 2P

CorePro LED PLC 8.5W 830 2P G24d-3

The CorePro LED PLC 2P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings and is environmentally friendly.

Product data

General information	
Cap base	G24D-3 [G24d-3]
CE mark	Yes
EU RoHS compliant	Yes
Nominal lifetime	30,000 h
Switching cycle	50,000
Lighting Technology	LED
	Sphere
Brand	Philips

Light technical	
Colour Code	830 [CCT of 3000K]
Beam angle (nom.)	120 degree(s)
Luminous Flux	950 lm
Colour designation	White (WH)
Correlated Colour Temperature	3000 K
Luminous Efficacy (rated) (Nom)	105.88 lm/W
Colour consistency	<6
Colour rendering index (CRI)	83
LLMF at end of nominal lifetime (nom.)	70 %

Operating and electrical	
Line Frequency	50 to 60 Hz

Input frequency	50 to 60 Hz
Power Consumption	8.5 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (nom.)	220-240 V

Temperature	
T-Case maximum (nom.)	75 °C

Mechanical and housing	
Bulb material	Plastic
Product length	200 mm
Bulb shape	Tube, single-ended

Approval and application	
Energy-saving product	Yes
Approval marks	TUV CE marking RoHS compliance KEMA Keur certificate
Energy consumption kWh/1,000 hours	9 kWh 403,554


CorePro LED PLC 2P

Product data

Full EOC	871869654123400
Order product name	CorePro LED PLC 8.5W 830 2P G24d-3
Order code	54123400
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10


Material number (12NC)	929001201202
Net weight	0.090 kg
Full product name	CorePro LED PLC 8.5W 830 2P G24d-3
EAN/UPC - Case	8718696541241

Dimensional drawing




Product	D1	D2	A1	A2	A3
CorePro LED PLC 8.5W 830 2P G24d-3	24.3 mm	28.4 mm	128.8 mm	148 mm	170.6 mm


Photometric data



General Illumination E1 Photo Lighting E1 Page 17





Light Distribution Diagram - CorePro LED PLC 8.5W 830 2P G24d-3

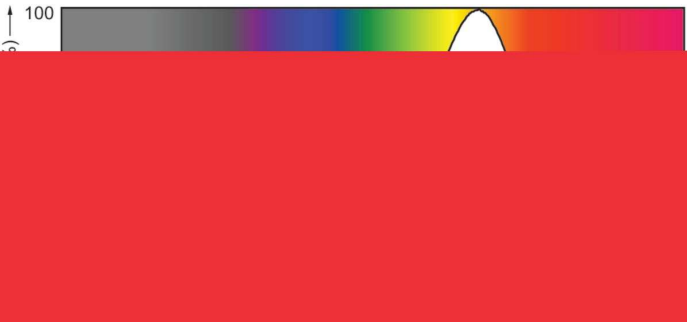

Spectral Power Distribution Colour - CorePro LED PLC 8.5W 830 2P G24d-3

CorePro LED PLC 2P


Lifetime

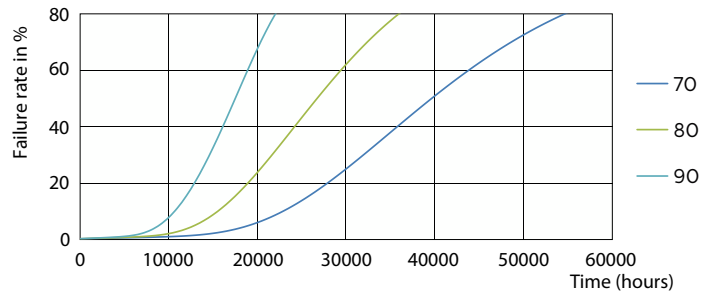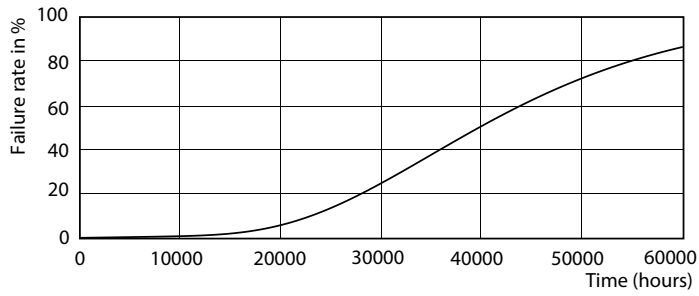


Life Expectancy Diagram - CorePro LED PLC 8.5W 830 2P G24d-3



Life Expectancy Diagram - CorePro LED PLC 8.5W 830 2P G24d-3

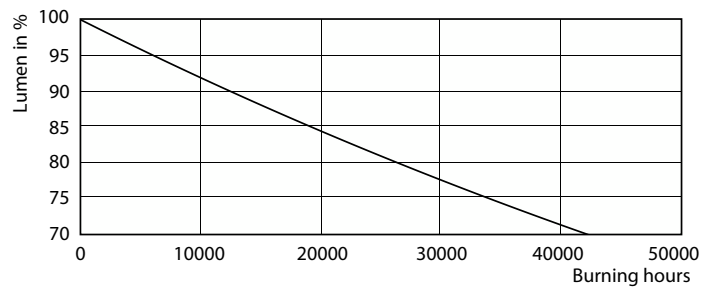

Life Expectancy Diagram - CorePro LED PLC 8.5W 830 2P G24d-3



Lumen Maintenance Diagram - CorePro LED PLC 8.5W 830 2P G24d-3

Lumen Maintenance Diagram - CorePro LED PLC 8.5W 830 2P G24d-3

CorePro LED PLC 2P

